

# CONSTRUCTION COIL NAILER



**Super Light Weight  
90mm Coil Nailer**

## CN890S-ST

drives 45~90 mm (1<sup>3</sup>/<sub>4</sub>"~3<sup>1</sup>/<sub>2</sub>") flat wire welded nails and flat plastic sheet collated nails



**360° Flexible Tailpiece**



### FEATURES

- **Well balanced and lightest weight of this class**  
Weight only 3.3kg (7.3 lbs). Compact and well balanced body.
- **Special sequential safety mechanism**  
To drive fasteners, first depress the contact arm, then pull and hold the trigger. The tool cannot fire a second nail until the trigger is released and the tool can cycle. This is a superior safety feature.
- **Runs both flat wire welded nails and plastic sheet collated nails without any adjustment**
- **Depth control dial**  
Nails depth is easily adjusted by manually turning the depth dial.
- **Equipped with plastic contact tip for sheathing and decking work**
- **Multi-directional exhaust cover**
- **Built-in silencer to reduce noise level**

### APPLICATIONS

- Floor and wall framing. ● Sub-flooring.
- Roof and wall sheathing. ● Fencing.

### TOOL SPECIFICATIONS


MODEL	CN890S-ST
WEIGHT	3.3kg (7.31 lbs)
DIMENSIONS	387(H)×129(W)×331(L)mm 14-7/16"×5-1/16"×13"
LOAD CAPACITY	300 nails (Wire welded nails) 300 nails (Plastic sheet collated nails)
OPERATING PRESSURE	5~7kg/cm <sup>2</sup> (Regulator) 70~100p.s.i.
AIR CONSUMPTION	2.04l/cycle at 6 bar (90p.s.i.) operating pressure
NOISE	A-weighted single-event sound power level <b>LWA, 1s, d 93.68 dB</b> A-weighted single-event emission sound pressure level at work station <b>LpA, 1s, d 84.88 dB</b> These values are determined and documented in accordance to CEN/TC 255 WG 1 N 45.3 E. (EN-standard in preparation)
VIBRATION	Vibration characteristic value = 4.62m/s <sup>2</sup> These values are determined and documented in accordance to ISO 8662-11

### FASTENERS AVAILABLE

- ▼ **Collation type**  
15 degree flat wire welded nails and 15 degree flat plastic sheet collated nails.



- ▼ **Shank type**

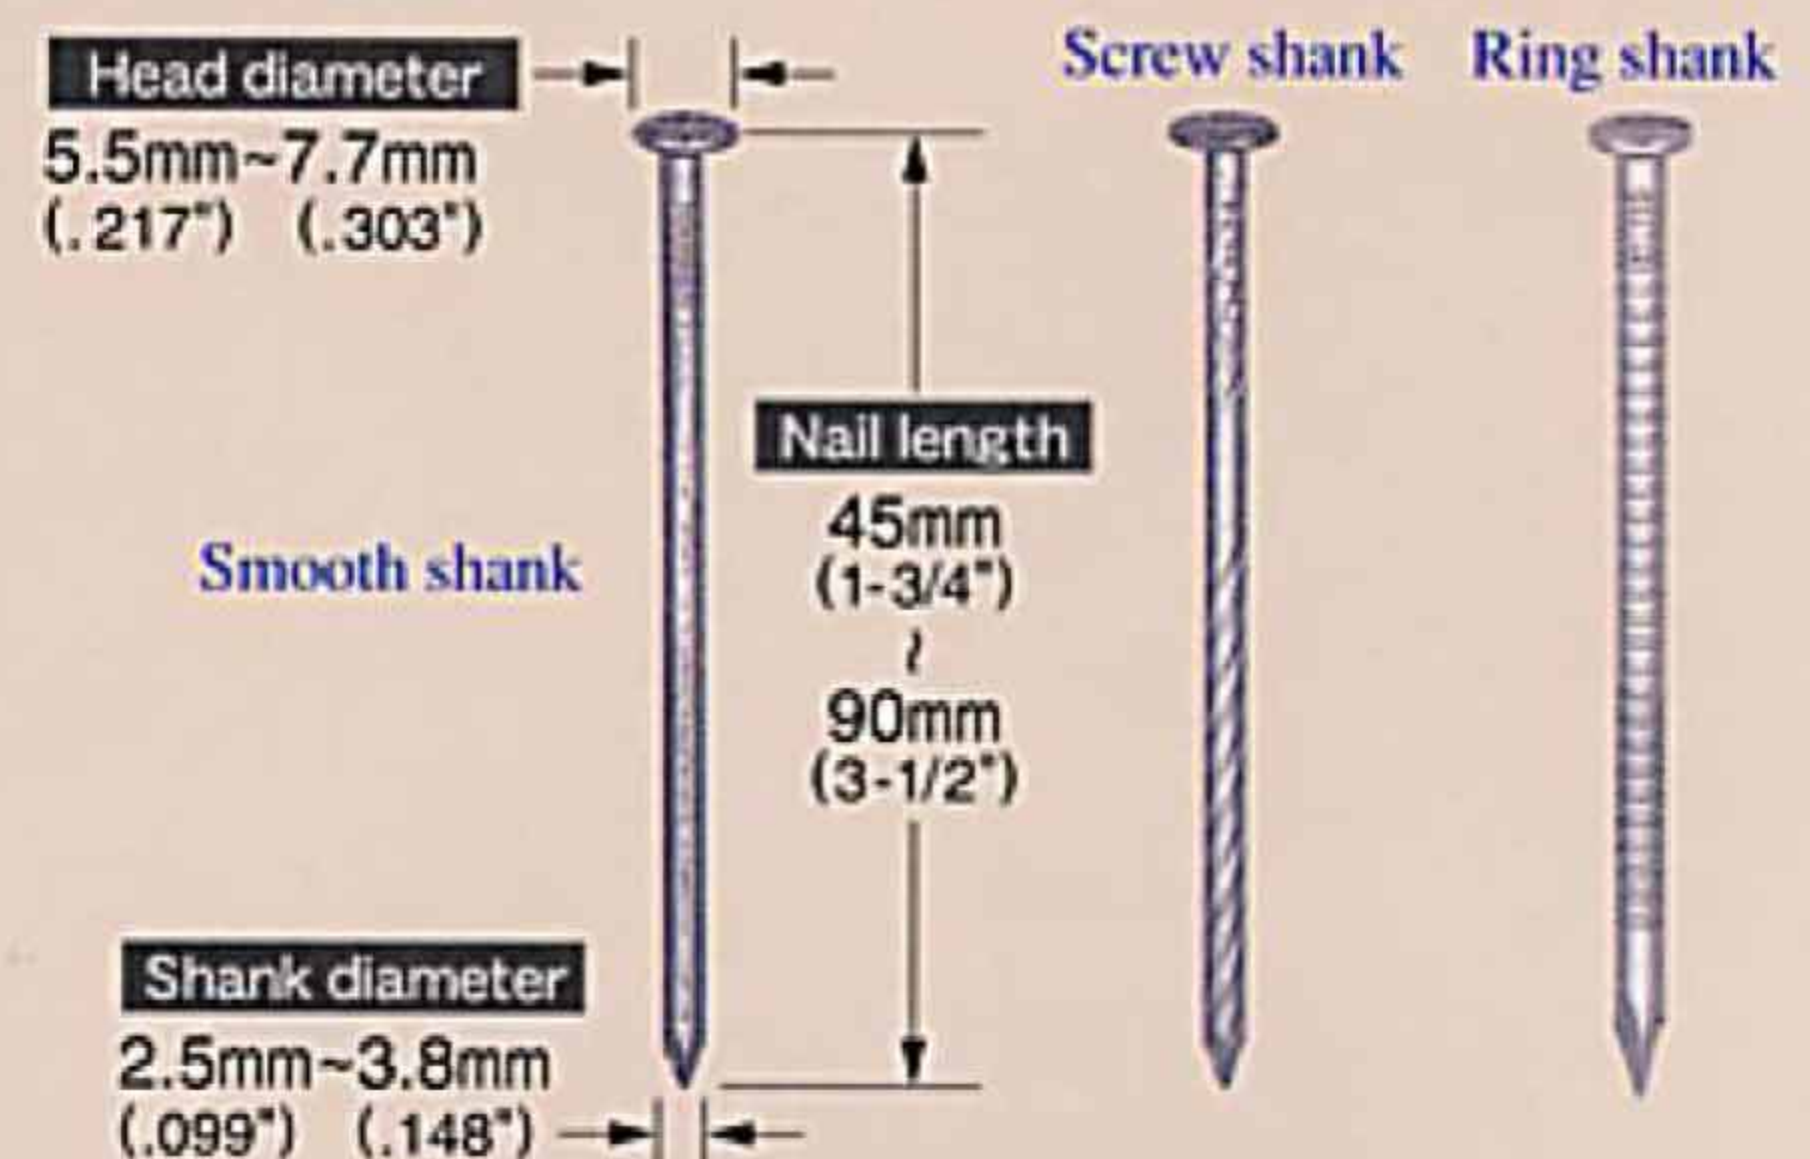

### OPTIONAL PARTS



The specifications and design of the products in this brochure will be subject to change without advance notice due to our continuous efforts to improve quality of our products

**MAX**

Sole NZ Distributor:  
**SIFCO**  
fastening solutions®

**AUCKLAND**  
34 Lansford Cres  
Avondale 0600  
Ph 09 828 2019  
Fax 09 828 2017

**TAURANGA**  
3/94 Newton Rd  
Mt Maunganui 3116  
Ph 07 575 6546  
Fax 07 575 6546

**CHRISTCHURCH**  
8 Holt Place  
Burnside 8053  
Ph 03 358 8135  
Fax 03 358 8930

[www.sifco.co.nz](http://www.sifco.co.nz)  
[sales@sifco.co.nz](mailto:sales@sifco.co.nz)

OS807AN

## APPLICATIONS FOR THE MAX® CN890S-ST CONSTRUCTION COIL NAILER

<u>Application Area</u>	<u>Product Code</u>	<u>Length &amp; Description</u>	<u>Nails/Coil</u>	<u>Box Size</u>
<b>WIRE COLLATED NAILS - BRIGHT STEEL, GALVANISED AND STAINLESS STEEL</b>				
Ecoply™ Barrier/Bracing	AC45R287HDGAL	45x2.87mm Hot dip galv ring shank	250	6,000
	AC50R280HDGAL	50x2.80mm Stainless/ring shank	250	6,000
	C50R280SS	50x2.80mm Stainless/ring shank	225	3,600
Timber fencing	AC57R250HDGAL	57x2.50mm Hot dip galv/ring shank	250	6,000
	AC64R250HDGAL	64x2.50mm Hot dip galv/ring shank	250	6,000
Linea™	C64R280SS	64x2.80mm Stainless/ring shank	225	3,600
	AC64R290HDGAL	64x2.90mm Hot dip galv/ring shank	250	6,000
	AC75R290HDGAL	75x2.90mm Hot dip galv/ring shank	250	6,000
	AC75R306HDGAL	75x3.06mm Hot dip galv/ring shank	225	3,600
	AC90P315	90x3.15mm bright smooth shank	225	2,700
Flooring	AC64R250HDGAL	64x2.50mm Hot dip galv/ring shank	250	6,000
	C57R250SS	57x2.50mm Stainless/ring shank	225	3,600
	C64R280SS	64x2.80mm Stainless/ring shank	225	3,600
Shadowclad™ & Exterior cavity battens	AC50R280HDGAL	50x2.80mm Hot dip galv ring shank	250	6,000
	C50R280SS	50x2.80mm Stainless/ring shank	225	3,600
	C64R280SS	64x2.80mm Stainless/ring shank	225	3,600
20mm Decking - Kwila	C57R250SS	57x2.50mm Stainless/ring shank	225	3,600
20mm Decking - Pine	AC57R250HDGAL	57x2.50mm Hot dip galv/ring shank	250	6,000
40mm Decking - Pine	C75R306SS	83x3.06mm Stainless/ring shank	225	2,700
	C83R306SS	83x3.06mm Stainless/ring shank	225	2,700
Cedar weatherboard	C64R250SS	64x2.50mm Stainless/ring shank	225	3,600
Board & Batten	C83R306SS	83x3.06mm Stainless/ring shank	225	2,700
<b>PLASTIC COLLATED GKN NAILS 7000 HOUR SALT TESTED - RUST RESISTANT</b>				
Treated ply bracing, Secret nailed Hardibacker	FSP50V5-GKN-OH	50x2.50mm GKN coated Screw shank	200	8,000
<b>PLASTIC COLLATED HARDENED NAILS - GALVANISED, STAINLESS</b>				
20mm battens to masonry, metal ceiling battens, metal joist hangers, Villaboard				
	FAP45V5-H	45x2.50mm Screw shank E galv.	200	6,000
35mm battens to masonry	FAP50V5-H	50x2.5mm Screw shank E galv.	200	6,000
	FAP45V5-SS	45x2.50mm Screw shank stainless	200	4,000
	FAP50V5-SS	50x2.50mm Screw shank stainless	200	6,000
45mm battens to masonry	FAP65V5HDGAL	65x2.50mm screw shank HDGAL	200	4,000
	FAP75V9	75x2.90mm screw shank E galv.	200	4,000
Nailing to steel framing	FKBP38V5GAL	38x2.50mm screw shank GAL	200	4,000
	KBP38V5GAL	38x2.50mm knurled shank GAL	200	4,000
	KBP65V5GAL	65x2.50mm knurled shank GAL	200	4,000
Linea face nailing	FAPC75V9HDGAL	75x2.95mm Screw shank HDGAL	200	4,000
	FAPC75V9SS	75x2.95mm Screw shank Stainless	200	4,000
<b>PLASTIC COLLATED HOT DIP GALVANISED AND STAINLESS STEEL NAILS</b>				
Ply bracing	FRP50V8HDGAL/6	50x2.80mm Hot dip galv ring shank	250	6,000
	FRP50V8SS/8	50x2.80mm Stainless/ring shank	225	3,600
Shadowclad™ & Exterior cavity battens	FRP50V8HDGAL/6	50x2.80mm Hot dip galv ring shank	250	6,000
	FRP50V8SS/8	50x2.80mm Stainless/ring shank	225	3,600
Coloursteel roof tiles	FSP50V5HDGB	50x2.50mm screw shank HDGAL	200	6,000
Ecoply™ barrier/bracing	FRP50V8HDGAL/6	50x2.8mm ring shank HDGAL	200	6,000
20mm Decking Kwila/Pine	FRP60V5SS	60x2.50mm ring shank stainless	200	3,600
Fencing/Decking	FRP60V5HDGAL	60x2.50m ring shank HDGAL	200	6,000
Wooden Weatherboards Fencing/Decking	FNR75W1HDGAL	75x3.10mm ring shank HDGAL	200	4,000
	FNR75W1SS	75x3.10mm ring shank Stainless	200	4,000
	FRJ75W1HDGAL	75x3.10mm ring shank Jolt HDGAL	200	4,000
	FRJ75W1SS	75x3.10mm ring shank Jolt Stainless	200	4,000
	FSJ75W1HDGAL	75x3.10mm screw shank Jolt HDGAL	200	4,000