

MAX

BUILDING OUR WORLD

SuperSider

CN565S3-ST

Drives 32mm to 64mm flat wire welded nails
Drives 32mm to 64mm flat plastic sheet collated nails

FEATURES



Driving power
(inch lbs)

6.8%
more

65Nm

60Nm

CN565S3

conventional
tool


● A rafter hook is installed on the tool



● Dial adjustable depth control



● Maintenance free end cap filter (US Patent 5637125)

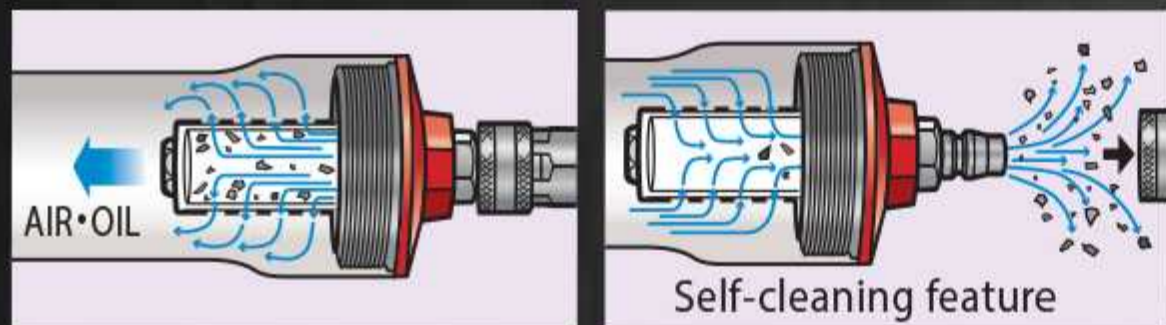

It prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a selfcleaning feature; foreign substances are ejected automatically from the tool when the air hose is disconnected.

● Easy-load magazine




● Easy twist adjustable exhaust deflector

Exhaust air can easily be diverted 360 away from user without any tool.



● Slim guide contact arm prevents from the wire scrap flying

There is no space between nose and contact arm and slim guide contact arm can guide the nail to the end

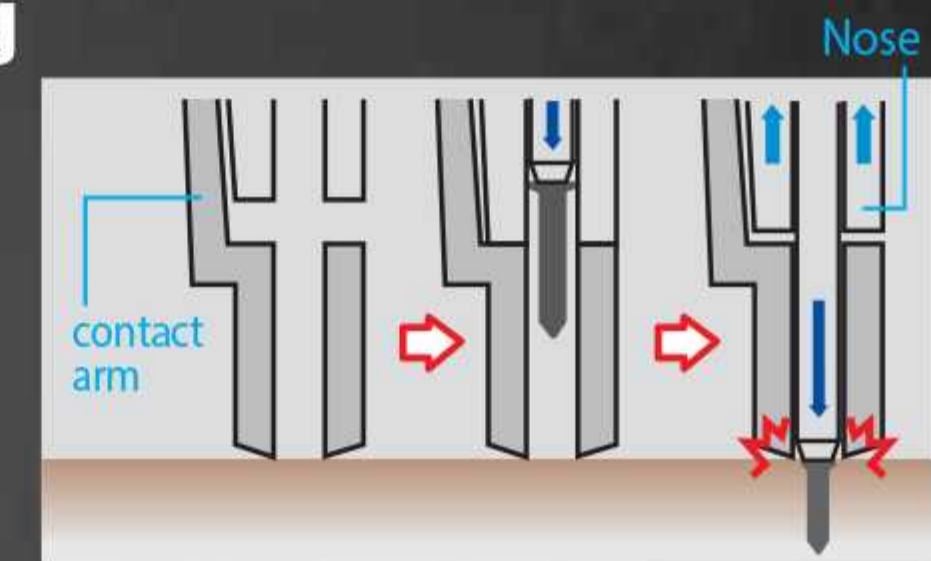

● New improved removable contact nose

Upgraded contact nose that is removable and designed with a larger inside diameter to accommodate larger nail heads, for easy jam clearance and to prevent accidental detachment.

● Slim guide contact arm doesn't highlight the driver mark



● Sequential firing mechanism



Rafter hook



Anti double fire trigger



Exhaust deflector



Self cleaning filter



Trigger lock lever



Depth control

APPLICATIONS

- Siding
- Fencing
- Exterior trim
- Sheathing
- Subfloors
- Roof decking
- Exterior deck
- Furring
- Strapping

TOOL SPECIFICATIONS

MODEL	CN565S3-ST
WEIGHT	2.36kg
DIMENSIONS	279mm x 127mm x 254mm
LOAD CAPACITY	400 nails
OPERATING PRESSURE	4.8 - 7 bar (70-100 psi)
AIR CONSUMPTION	0.05 ft ³ / cycle (100 psi operating pressure)

STAPLES APPLICABLE

15 degree flat wire welded coil nails

Head diameter
5mm - 6mm

Smooth Screw Ring



Nail length
38mm
64mm

Shank diameter
2.10mm-2.50mm

15 degree flat plastic collated coil nails

Head diameter
5mm-6mm

Smooth Screw Ring



Nail length
32mm
64mm

Shank diameter
2.10mm-2.50mm

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

SIFCO

fastening solutions

AUCKLAND
34 Lansford Cres
Avondale
Ph 09 828 2019
Fax 09 828 2017
Email:sales@sifco.co.nz

TAURANGA
3/94 Newton Rd
Mt Maunganui
07 575 0088
07 575 6546

CHRISTCHURCH
8 Holt Place
Burnside
03 358 8135
03 358 8930

OS941NZ

www.sifco.co.nz

APPLICATIONS FOR THE MAX® CN565S3-ST SUPERSIDER COIL NAILER

<u>Application Area</u>	<u>Product Code</u>	<u>Length & Description</u>	<u>Nails/Coil</u>	<u>Box Qty</u>
WIRE COLLATED NAILS - BRIGHT STEEL, GALVANISED AND STAINLESS STEEL				
Timber fencing	AC57R250HDGAL	57x2.50mm Hot dip galv ring shank	250	6,000
	AC64R250HDGAL	64x2.50mm Hot dip galv ring shank	250	6,000
Flooring	AC57R250HDGAL	57x2.50mm Hot dip galv/ring shank	250	6,000
	AC64R250HDGAL	64x2.50mm Hot dip galv/ring shank	250	6,000
	C57R250SS	57x2.50mm Stainless ring shank	225	3,600
	C64R250SS	64x2.50 Stainless ring shank	225	3,600
20mm Decking - Kwila	C57R250SS	57x2.50mm Stainless ring shank	225	3,600
20mm Decking - Pine	AC57R250HDGAL	57x2.50mm Hot dip galv ring shank	250	6,000
Cedar weatherboard	C64R250SS	64x2.50mm Stainless ring shank	225	3,600
PLASTIC COLLATED HARDENED NAILS - GALVANISED, STAINLESS				
Tile & slate underlay	FAP27V5-H	27x2.5mm Hardened screw shank E galv.	200	6,000
	FAP32V5-H	32x2.50mm Hardened screw shank E galv.	200	6,000
20m battens to masonry, metal ceiling battens, metal joist hangers, Villaboard	FAP38V5-H	38x2.50mm Hardened screw shank E galv.	200	6,000
	FAP45V5-H	45x2.50mm Hardened screw shank E galv.	200	6,000
	FAP50V5-H	50x2.5mm Hardened screw shank E galv.	200	6,000
35mm battens to masonry	FAP50V5-H	50x2.5mm Hardened screw shank E galv.	200	6,000
Axon™ to Hardibatten™	FAP27V5-SS	27x2.5mm Hardened screw shank stainless	200	6,000
	FAP32V5-SS	32x2.5mm Hardened screw shank stainless	200	4,000
	FAP38V5-SS	38x2.5mm Hardened screw shank stainless	200	4,000
	FAP50V5-SS	50x2.5mm Hardened screw shank stainless	200	6,000
PLASTIC COLLATED HOT DIP GALVANISED AND STAINLESS STEEL NAILS				
Ply bracing	FRP50V8HDGAL/6	50x2.80mm Hot dip galv ring shank	250	6,000
	FRP50V8SS/8	50x2.80mm Stainless ring shank	225	3,600
Shadowclad™ & Exterior cavity battens	FRP50V8HDGAL/6	50x2.80mm Hot dip galv ring shank	250	6,000
	FRP50V8SS/8	50x2.80mm Stainless ring shank	225	3,600
Metal garage cladding	FSP32V8HDGAL/6	32x2.80mm Hot dip galv screw shank	200	6,000
	FSP40V8HDGAL/6	40x2.80mm Hot dip galv screw shank	200	6,000
Coloursteel™ roof tiles	FSP50V5HDGB	50x2.50mm Hot dip galv screw shank	200	6,000
Ecoply™ barrier/bracing	FRP50V8HDGAL/6	50x2.80mm Hot dip galv ring shank	200	6,000
20mm Decking Kwila/Pine	FRP60V5SS	60x2.50mm Stainless ring shank	200	3,600
	FAP65V5GAL	65x2.50mm Galvanised screw shank	250	4,000
Fencing/Decking	FRP60V5HDGAL	60x2.50m Hot dip galv ring shank	200	6,000
Steel Frame homes	KBP38V5GAL	38x2.50mm knurled shank ballistic point galv.	200	4,000
	KBP65V5GAL	65x2.50mm knurled shank ballistic point galv.	200	4,000
Soffits	FSP32V8HDGAL/6	32x2.80mm Hot dip galv ring shank	200	6,000
Anchor plates/metal strap Hardibacker™	FRP50V8HDGAL/6	50x2.80mm Hot dip galv ring shank	200	6,000
Cedar weatherboard	FSP60V5SS	60x2.50mm Stainless ring shank	225	3,600