

# MAX<sup>®</sup> BUILDING OUR WORLD

## SuperFramer CN890F2-ST

drives 50mm to 90mm  
15 degree wire welded coil nail



### FEATURES


- Dial adjustable depth control  
Easily adjust depth of nail without tools.

- Pointy teeth on contact arm  
Aggressive nose for toe nailing.

- No-mar contact tip included

- Maintenance free end cap filter  
(US Patent 5637125)

It prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a selfcleaning feature; foreign substances are ejected automatically from the tool when the air hose is disconnected.

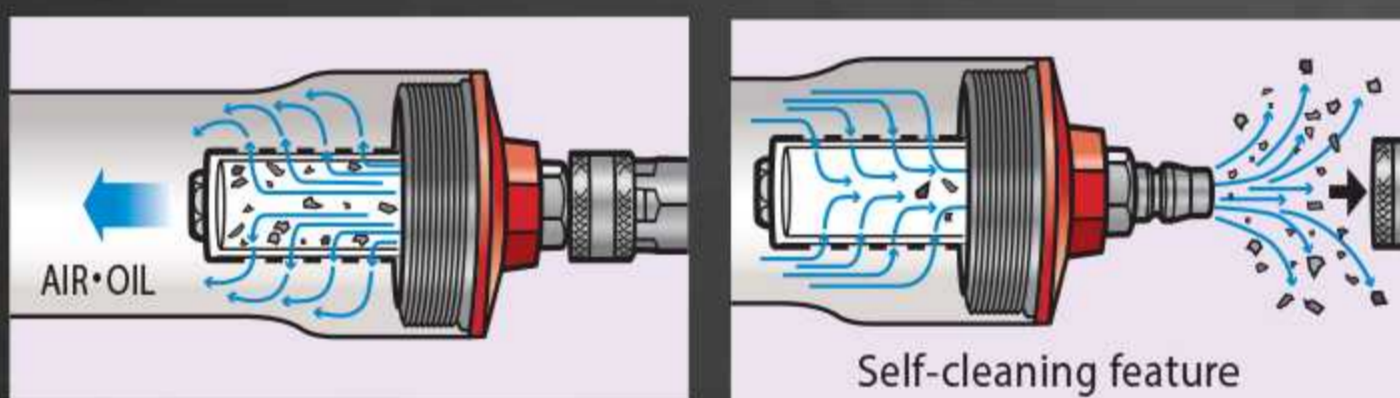

- Comfortable rubber grip

#### APPLICATIONS

- Framing ● Sheathing ● Decking ● Subfloors ● Exterior deck
- Furring ● Siding ● Crate & box assembly

#### TOOL SPECIFICATIONS

MODEL	CN890F2-ST
WEIGHT	3.49kg
DIMENSIONS	330mm(H) x 127mm(W) x 279mm(L)
LOAD CAPACITY	300 nails
OPERATING PRESSURE	70 - 100 psi (4.8 - 7 bar)
AIR CONSUMPTION	0.11 ft <sup>3</sup> / cycle (100psi operating pressure)

Driving power **7.2% more**

**12Nm**  
CN890F2

**11Nm**  
conventional tool

- Ultra lightweight only 3.49kg.
- Short height design only 330mm.

- Unique tangle free swivel fitting  
No more fighting with heavy hoses, no matter what angle the nailer is being held.



- Heavy duty rafter hook



- Easy-load magazine  
Nails support folds out to easily load fasteners.



- Sequential safety mechanism.

SINGLE FIRING



- Tangle free swivel fitting
- Rafter hook
- Anti double fire trigger
- Self cleaning filter
- Trigger lock lever
- Depth control

#### APPLICABLE FASTENERS

Shank type

Smooth Shank      Screw shank      Ring shank

Head diameter: 6.5mm - 7.7mm

WIRE: 15 degree wire welded coil nails

Nail length: 50mm, 90mm

Shank diameter: 2.50mm - 3.33mm

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

**SIFCO**  
fastening solutions

AUCKLAND  
34 Lansford Cres  
Avondale  
Ph 09 828 2019  
Fax 09 828 2017  
Email:sales@sifco.co.nz

TAURANGA  
3/94 Newton Rd  
Mt Maunganui  
07 575 0088  
07 575 6546

CHRISTCHURCH  
8 Holt Place  
Burnside  
03 358 8135  
03 358 8930

OS942NZ

www.sifco.co.nz

# APPLICATIONS FOR THE MAX® CN890F-ST CONSTRUCTION COIL NAILER

<u>Application Area</u>	<u>Product Code</u>	<u>Length &amp; Description</u>	<u>Nails/Coil Box Qty</u>	
<b>WIRE COLLATED NAILS - BRIGHT STEEL, GALVANISED AND STAINLESS STEEL</b>				
Ecoply™ Barrier/Bracing	AC45R287HDGAL	45x2.87mm Hot dip galv ring shank	250	6,000
	AC50R280HDGAL	50x2.80mm Stainless ring shank	250	6,000
	C50R280SS	50x2.80mm Stainless ring shank	225	3,600
Timber fencing	AC57R250HDGAL	57x2.50mm Hot dip galv ring shank	250	6,000
	AC64R250HDGAL	64x2.50mm Hot dip galv ring shank	250	6,000
Linea™	C64R280SS	64x2.80mm Stainless ring shank	225	3,600
	AC64R290HDGAL	64x2.90mm Hot dip galv ring shank	250	6,000
	AC75R290HDGAL	75x2.90mm Hot dip galv ring shank	250	6,000
	AC75R306HDGAL	75x3.06mm Hot dip galv ring shank	225	3,600
	AC90R315HDGAL	90x3.15mm Hot dip galv ring shank	225	2,700
Flooring	AC64R250HDGAL	64x2.50mm Hot dip galv ring shank	250	6,000
	AC64R290HDGAL	64x2.90mm Hot dip galv ring shank	250	6,000
	C57R250SS	57x2.50mm Stainless ring shank	225	3,600
	C64R280SS	64x2.80mm Stainless ring shank	225	3,600
Shadowclad™ & Exterior cavity battens	AC50R280HDGAL	50x2.80mm Hot dip galv ring shank	250	6,000
	AC64R290HDGAL	64x2.90mm Hot dip galv ring shank	250	6,000
	C50R280SS	50x2.80mm Stainless ring shank	225	3,600
	C64R280SS	64x2.80mm Stainless ring shank	225	3,600
20mm Decking - Kwila	C57R250SS	57x2.50mm Stainless ring shank	225	3,600
	C64R280SS	64x2.80mm Stainless ring shank	225	3,600
20mm Decking - Pine	AC57R250HDGAL	57x2.50mm Hot dip galv ring shank	250	6,000
	AC64R250HDGAL	64x2.50mm Hot dip galv ring shank	250	6,000
	AC64R290HDGAL	64x2.90mm Hot dip galv ring shank	250	6,000
	C64R280SS	64x2.80mm Stainless ring shank	225	3,600
40mm Decking - Pine	C75R315SS	83x3.15mm Stainless ring shank	225	2,700
	C83R306SS	83x3.06mm Stainless ring shank	225	2,700
	C90R315SS	90x3.15mm Stainless ring shank	225	2,700
Cedar weatherboard	C64R250SS	64x2.50mm Stainless ring shank	225	3,600
	C64R280SS	64x2.80mm Stainless ring shank	225	3,600
Board & Batten	C83R306SS	83x3.06mm Stainless ring shank	225	2,700
	C90R315SS	90x3.15mm Stainless ring shank	225	2,700