

MAX

PowerLite™

PowerLite™ 500PSI Compressor

AKHL1260E

Ultra Lightweight
16kg

Quiet Mode

is suitable for facility maintenance jobs which require quiet operations (i.e hospitals, schools, etc.)

4 Air Outlets

2 outlets for High Pressure tools
2 outlets for 100psi tools



DC-Brushless motor with an Inverter circuit allows start up in freezing temperatures and also functions in poor electric supply conditions down to 70 volts without tripping the circuit breaker.



Easy Drain Lever

LED Control Panel

alerts you of the following situations:
- Maintenance (1,000 hours operating time)
- Service required
- Low voltage
- High voltage
- High motor/ control circuit temperature

PowerLite™ 500PSI Compressor


AKHL1260EX

22 litre Large Capacity Air Tank

Suitable for rapid fire applications like floor decking.

Easy Detachable Tank

Easily convert to 2 tank model (AKHL1260E) by removing 4 screws.

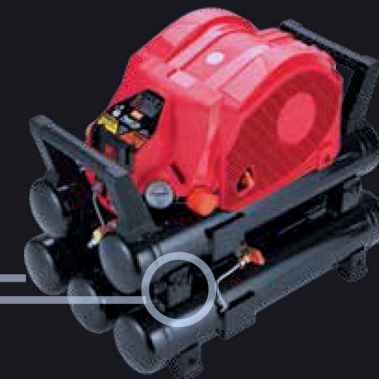

CONTINUOUS FASTENING ABILITY*

*Number of nails were counted until the nail was no longer flush.
*45 sec. interval time was taken for replacing a coil of nails.

AKHL1260EX



500psi

100psi

290nails

800nails

AKHL1260E



500psi

100psi

110nails

330nails

100psi 4 CFM Compressor

45nails

Test condition:
1. Application: Floor Decking 12mm plywood to framing timber
2. Size of nail: 50mm x 2.87mm
3. Tool: HN90 High Pressure Coil Framing Nailer (HP)/ CN890F2 Coil Framing Nailer (100psi)
4. Shooting interval: 2 shots /sec.
5. Operating air pressure: 220psi (HP)/ 110psi (100psi)

500PSI PowerLite™ ACCESSORIES

Air Tank



AKTH13

(ONLY for AKHL1260E)

It connects to the AKHL1260E to increase the capacity of air volume.

Air Hose



KH6x30

(30 metres)



SD630A2

30 metres
KH6x30 high pressure hose with stainless steel hose reel

Splitter MFF



ARC-HI

SIFCO®

fastening solutions

AUCKLAND
34 Lansford Cres
Avondale
Ph 09 828 2019
Fax 09 828 2017
Email sales@sifco.co.nz

TAURANGA
3/94 Newton Rd
Mt Maunganui
07 575 0088
07 575 6546

CHRISTCHURCH
8 Holt Place
Burnside
03 358 8135
03 358 8930

www.sifco.co.nz

OS944NZ

Item#:	AKHL1260E	AKHL1260EX
Weight:	16kg	23kg
Dimensions(LxWxH):	58 x 32 x 33	58 x 38 x 46
Tank Capacity:	9 litre	22 litre
Horse Power:	2HP	
Power Supply:	230 V±10% 50 Hz±1%	
Noise:	67.5 db (Normal mode) 66.4 db (Quiet mode)	
Rated Current:	12A	
Motor RPM:	2,900 (Normal mode) 1,600 (Quiet mode)	
Air Displacement:	3.4 CFM @100PSI 2.6 CFM @300PSI	