

Cordless

MAX

SuperFramer

GS690CH

Easy set-up

Requires no hoses, no compressors

34° Clipped-head nails

Uses standard 34-degree paper collated clipped-head stick nails

Lightweight and well-balanced

Weighs only 3.5kg with solid aluminum Magazine

Powerful motor

Drives up to 90mm x 3.3mm nails

CE



High-Powered fuel cell



Cordless SuperFramer[®] GS690CH



STANDARD EQUIPMENT

- Rechargeable battery
- AC battery charger
- Plastic carry case



OPTION




12V Car adapter cord

TOOL SPECIFICATIONS

Product name	GS690CH	
Dimensions	391(H) × 110(W) × 340(L) mm (15-3/8" × 4-3/8" × 13-3/8")	
Weight	3.5 kg (7.8 lbs)	
Load Capacity	40 nails/1 strip	
Firing mode	Sequential trip	
Battery type	Ni-MH 6V DC 1.5Ah	
Recharge time	150 minutes at maximum	
Battery life/charge	Approx. 4,500 nails	
Fuel cell life	Approx. 1,100 nails (26°C)	
NOISE	A-weighted single-event sound power level LWA, 1s, d 105.4dB	
	A-weighted single-event emission sound pressure level at work station LpA, 1s, d 98.8dB	
	These values are determined and documented in accordance to EN12549:1999.	
	VIBRATION	
VIBRATION	Vibration characteristic value = 4.46m/s ² These values are determined and documented in accordance to ISO 8662-11	

APPLICABLE FASTENERS

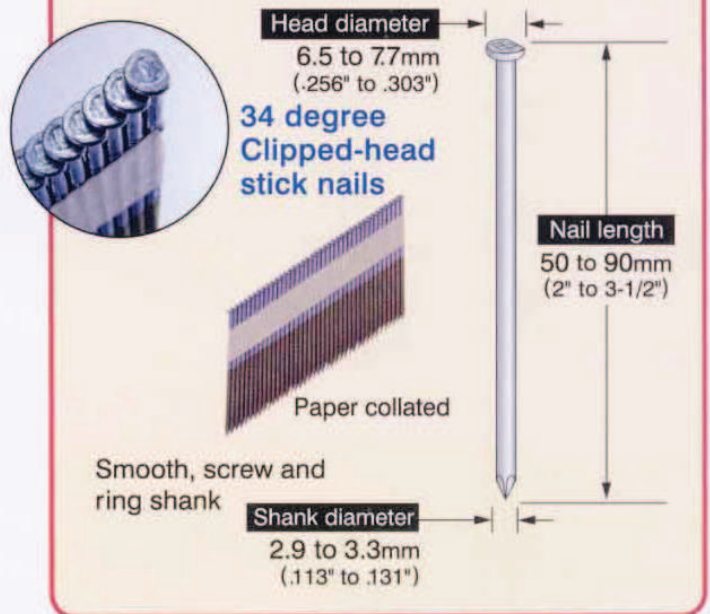

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



SIFCO
fastening solutions

AUCKLAND
34 Lansford Cres
Avondale
Ph 09 828 2019
Fax 09 828 2017

TAURANGA
3/94 Newton
Mt Maunganui
Ph 07 575 0088
Fax 07 575 6546

CHRISTCHURCH
8 Holt Place
Burnside
Ph 03 358 8135
Fax 03 358 8930

sales@sifco.co.nz
www.sifco.co.nz