

## NF565/16

Drives 32 to 65mm(1-1/4" to 2-1/2") length Brad nails

## **FEATURES**

- ■Lightweight-only 1.6kg & Slim body Compact and well balanced body. Easily reaches tight spots.
- ■Sequential fire mechanism The tool can be contact or single fired with switch lever.





Dial adjustable depth

Dial depth control requires no special tools.

■Easy jam clearance system



Belt hook

Easy twist adjustable exhaust deflector

Exhaust air can easily be diverted 360° away from user without any tool.



## APPLICATIONS

- Door and window casings
   ◆Plywood,decorative boards, and other interior finish works 
  Panel assembly and mouldings
- Sub flooring
   Furniture assembly, case back fastening. blind pinning and other finishing work ●Cabinet assembly






The specifications and design of the products in this catalogue will be subject to change without advance notice due to our continuous efforts to improve the quality of our products



PRODUCT NO.		NF565/16	
DIMENSIONS		285(H)×96(W)×297(L)mm (11-3/6"×3-13/16"×11-11/16")	
WEIGHT		1.6kg (3.5lbs)	
RECOMMENDED OPERATING PRESSURE		5 to 7 bar (70 to 100 p.s.i.)	
LOADING CAPACITY		100 brads	
AIR CONSUMPTION		1.30(0.045ft3) at 6.9 bar operating pressure	
TECHNICAL DATA NOISE	A-weighted single-event sound power level	LWA,1s, d 93.3dB	These values are determined and documented in accordance to EN12549:1999
	A-weighted single-event sound pressure level	LpA,1s, d 84.2dB	
VIBRATION Vibration characteristic value		3.5 m/s <sup>2</sup> These values are determined and documentedin accordance to ISO 8662-11	

OOL SPECIFICATIONS

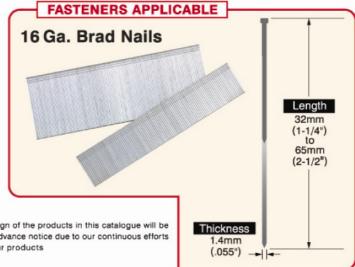



Sole NZ Distributor fastening solutions **AUCKLAND** 34 Lansford Cres 3/94 Newton Rd Avondale Ph 09 828 2019 Ph 07 575 0088 Ph 03 358 8135

**TAURANGA** Mt Maunganui

Fax 09 828 2017 Fax 07 575 6546 Fax 03 358 8930

CHRISTCHURCH 8 Holt Place Burnside

www.sifco.co.nz sales@sifco.co.nz

OS7240NZ