

PowerLite™ Framer

MAX[®]

HN75

MAX's New
**Compact
Powerful
Lightweight
Coil Nailer**



400 Next Generation Nailers Powered by
psi technology


PowerLite™ All-Rounder Tool HN75

The 20 bar technology was first introduced by MAX in Japan in 1994 and is now available

FEATURES

APPLICATIONS

- Blue Board ● Crates and Boxes ● Flooring-Timber to Steel ● Flooring-Timber to Timber ● Metal Connectors ● Metal to Timber ● Ply Bracing ● Timber Decking to Steel ● Timber Decking to Timber ● Timber Fences ● Timber Frames ● Timber to Steel ● Weatherboards ● Weathertex ● Wooden Pallets

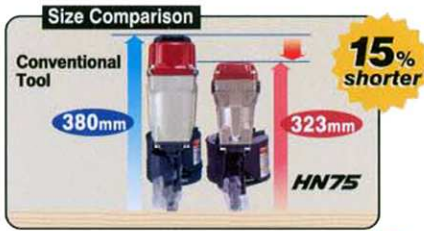

Only **2.4 kg**



- Anti-double fire mechanism (UK Patent 2286790)
- New design recoil reduction valve (Patent Pending)




● Reduced Exhaust Air System Side exhaust with built-in silencer

● Trigger Lock Dial for safety



● Maintenance free end cap filter (DEU Patent 19539950) (UK Patent 2294412)




Comes with plastic carry case

● Dial adjustable depth control



TOOL SPECIFICATIONS

MODEL	HN75
WEIGHT	2.4kg (5.3lbs)
DIMENSIONS	323(H) × 129(W) × 294(L)mm
LOAD CAPACITY	300 nails
OPERATING PRESSURE	12 to 23 bar (170 to 320 p.s.i.)
AIR CONSUMPTION	3.4l/cycle at 18 bar (257 p.s.i.) operating pressure
NOISE	A-weighted single-event sound power level LWA, 1s, d 97.74dB A-weighted single-event emission sound pressure level at work station LpA, 1s, d 89.82dB These values are determined and documented in accordance to EN12549: 1999.
VIBRATION	Vibration characteristic value = 4.07m/s ² These values are determined and documented in accordance to ISO 8662-11



High power

Has enough power to drive nails through LVL.

Lightweight



FASTENERS APPLICABLE

15 degree flat wire welded nails



Head diameter: 6.0 to 7.7mm

Nail length: 45(*35) to 75mm

Smooth Screw and Ring Shank

Shank diameter: 2.5 to 3.8mm

(*MAX FA35V7 ONLY)

15 degree flat plastic sheet collated nails



Head diameter: 5.5 to 7.0mm

Nail length: 32 to 65mm

Shank diameter: 2.5 to 2.9mm

For the PowerLite All-Rounder Tool HN75 operation, the PowerLite Compressor and PowerLite Hose are required.

PowerLite Compressor

AKHL1050E



The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



Sole NZ Distributor:
SIFCO
fastening solutions®

AUCKLAND
34 Lansford Cres
Avondale 0600
Ph 09 828 2019
Fax 09 828 2017

TAURANGA
3/94 Newton Rd
Mt Maunganui 3116
Ph 07 575 6546
Fax 07 575 6546

CHRISTCHURCH
8 Holt Place
Burnside 8053
Ph 03 5358 8135
Fax 03 358 8930

www.sifco.co.nz
sales@sifco.co.nz

OS7307NZ