

**Cordless Rotary Hammer**

**PJR265**

**MAX**®

**Faster than  
36V Type  
Hammer**

- Highest Durability in Cordless Rotary Hammer.
- Most holes per charge in its class.



**25.2v**

**LITHIUM ION BATTERY**

**MAX**  
**Lithium**  
**25.2V**  
PLUS 3.0Ah

**CE**



# Cordless Rotary Hammer

## PJR265



### FEATURES

#### 1 Best-in-class cordless rotary hammer in drilling speed.

Thanks to Sensor-less Brushless Motor installed, PJR265 provides you with the fastest speed in its class.

#### 2 More powerful impact with 25.2V battery using unique mechanism v.s. conventional 36V-battery models.

New "Impact Generating Mechanism" designed by MAX provides more powerful impact and faster drilling speed than any other 36V battery-powered model.

Impact energy comparison (Unit: Joules)

PJR265	Brand A (28.8V)	Brand B (36.0V)
3.4J	2.4J	3.0J



#### 3 More holes per charge.


Energy saving Brushless Motor equals job productivity with light-weight 25.2V Lithium-ion battery.

Average hole numbers available per a charge

Bit size	Depth	Number of hole
φ 6.5mm	30mm	184
φ 12.5mm	30mm	100
φ 14.5mm	100mm	20
φ 18.0mm	60mm	26

■ Concrete hardness : 350kgf/cm<sup>2</sup>

#### 4 Stable and consistent performance.

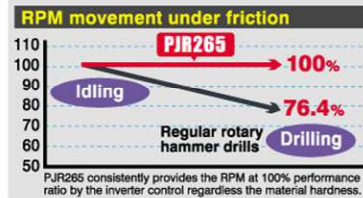

PJR265 consistently provides the RPM at 100% performance ratio with our inverter control regardless of the material hardness.



#### Drilling Mode Lever

- Rotation / Rotation Drilling 2 modes
- Push button prevent from false operation

#### Forward / Reverse switch

#### Comfortable rubber grip

Easy to grip and tireless

#### Variable speed trigger switch



#### Lithium-ion rechargeable battery 25.2V 3.0Ah



### TOOL SPECIFICATIONS

Product name	PJR265(CE) Cordless Rotary Hammer		
Bit type	SDS PLUS		
Voltage/ Battery	Lithium-ion rechargeable battery 25.2V 3.0Ah		
RPM	0~560RPM (Low mode) 0~920RPM (Normal mode)		
Impact rate	0~2,860BPM (Low impact mode) 0~4,700BPM (Normal impact mode)		
Maximum Drilling Diameter	Concrete : φ26mm	Steel : φ13mm	Wood : φ30mm
Motor	Brushless DC motor		
Size	L 332mm × H 210mm × W 82mm (Inc. Battery pack)		
Weight	3.7kg (Inc. Battery pack)		
Accessories	Battery pack (JP-L925) 2-pcs battery charger (JC-928) Side handle · Depth Gauge Instruction manual · Carrying case		

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



Sole NZ Distributor  
**SIFCO**  
fastening solutions

AUCKLAND  
34 Lansford Cres  
Avondale  
Ph 09 828 2019  
Fax 09 828 2017

TAURANGA  
3/94 Newton Rd  
Mt Maunganui  
Ph 07 575 0088  
Fax 07 575 6546

CHRISTCHURCH  
8 Holt Place  
Burnside  
Ph 03 358 8135  
Fax 03 358 8930

sales@sifco.co.nz  
www.sifco.co.nz

OS8110NZ