



# 92.25SQ


## USE, MAINTENANCE & SPARE PARTS MANUAL



### TECHNICAL DATA

Lengths mm	9 ÷ 25	<p>Type of Fastener</p> <p>8.70mm</p> <p>0.9mm -</p> <p>25mm -</p> <p>6.50</p> <p>1.00 x 1.25</p>
Magazine capacity	100	
Operating pressure	5 ÷ 6.5 bar 70 ÷ 95 psi	
Air consumption litres/stroke	0.31	
Weight kg	1.10	
Dimensions mm	226 x 50 x 211	
Sound pressure in operator's position	86 dB(A)	
Sound power emitted	95 dB(A)	
Vibratory emissions on handle	2.55 m/s <sup>2</sup>	

# SPARE PARTS

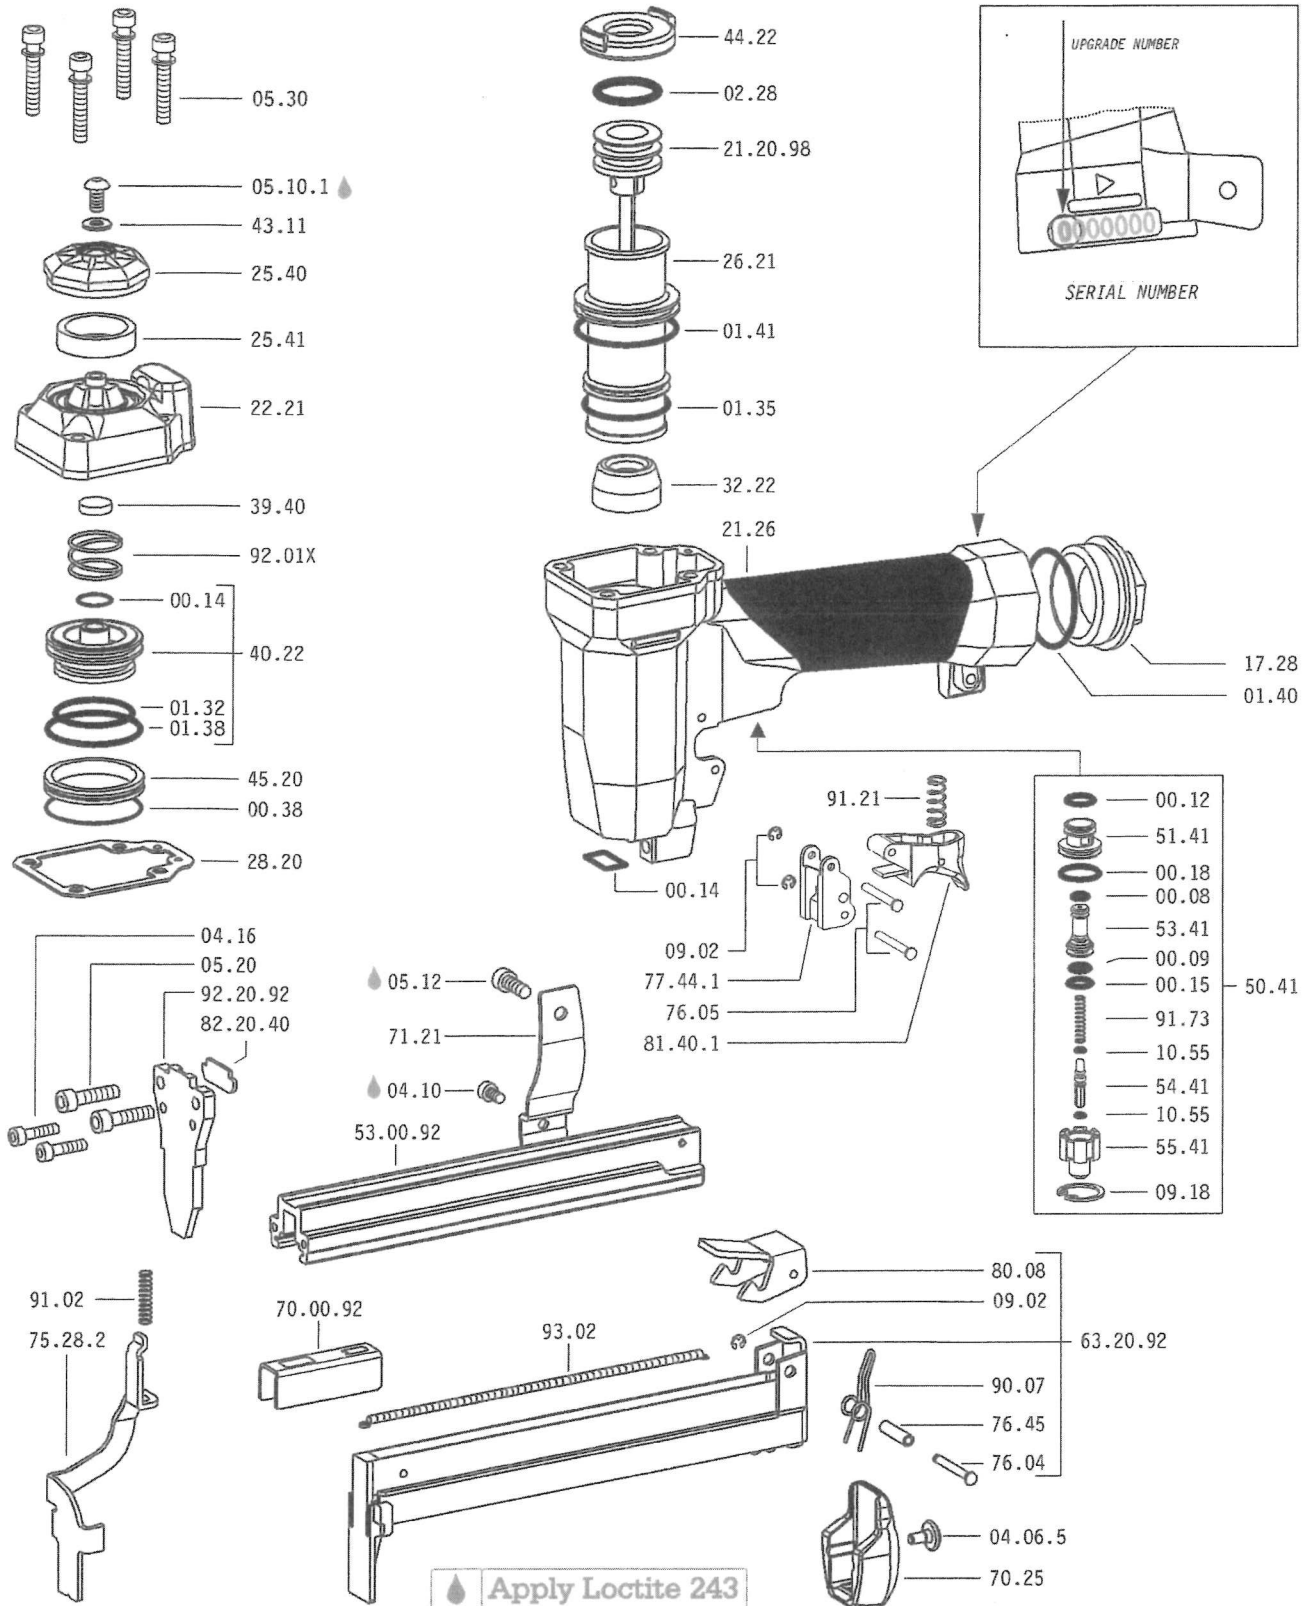


# EQUIPMENT



07.30



07.40



D01

## 92.25 SQ

Sept 2023

# SPARE PARTS

**Cod.**      **Description**

00.08	O-Ring
00.09	O-Ring
00.12	O-Ring
00.14	O-Ring
00.15	O-Ring
00.18	O-Ring
00.38	O-Ring
01.32	O-Ring
01.35	O-Ring
01.38	O-Ring
01.40	O-Ring
01.41	O-Ring
02.28	O-Ring
04.06.5	Screw
04.10	Screw
04.16	Screw
05.10.1	Screw
05.12	Screw
05.20	Screw
05.30	Screw
07.30	Hex. bar wrench
07.40	Hex. bar wrench
09.02	Elastic ring
09.18	Elastic ring
10.55	O-Ring
17.28	Inlet cap
21.26	Body
22.21	Head
25.40	Exhaust deflector
25.41	Silencer
26.21	Cylinder
28.20	Head gasket
32.22	Bumper
39.40	Exhaust seal
40.22	Valve ass'y
43.11	Washer
44.22	Gasket
45.20	Ring
50.41	Trigger valve ass'y
51.41	Trigger valve housing
53.41	Valve piston
54.41	Trigger valve
55.41	Bush
70.25	Guard
71.21	Support
75.28.2	Safety
76.04	Pin
76.05	Pin
76.45	Pin
77.44.1	Safety guide
80.08	Trigger
81.40.1	Trigger
90.07	Spring
91.02	Spring
91.21	Spring
91.73	Spring
92.01X	Spring
93.02	Spring
21.20.92	Driver
53.00.92	Magazine
63.20.92	Slider
70.00.92	Pusher
82.20.40	Nose
92.20.92	Nose plate
D01	Oiler

**O-RINGS**

