

# MAX<sup>®</sup>

## HR-AVII/TS AIR PACKNER

Pneumatic Operated  
Packaging Machine



Suitable for Liquid products sealing  
as well as Plastic and Netlon bag sealing





# HR-AVII/TS AIR PACKNER

## HR-AVII/TS FEATURES:

1. Loads up to 2,000 staples
2. Excellent durability - Main components are Stainless Steel
3. Adjustable built-in cutter in 2 steps
4. Free working direction setting
5. Adjustable height 270mm-330mm
6. An all-Stainless Steel stand available as an option (adj. height of 0.87m - 1.17m)
7. Smooth round profile of staple edge
8. Vertical Loading




## APPROX. RANGE OF SEALING

Staples		TS712 Reel	TS715 Reel
RANGE OF SEALING	Sectional mm <sup>2</sup>	10~24mm <sup>2</sup>	14~28mm <sup>2</sup>
	Plastic bag thickness 0.04	130~300mm	175~350mm
	Plastic bag thickness 0.05	100~240mm	140~280mm
	Plastic bag thickness 0.06	80~200mm	117~233mm

### Optional Addition: HR-AVII STAND

Adjustable Height:  
0.87m - 1.17m

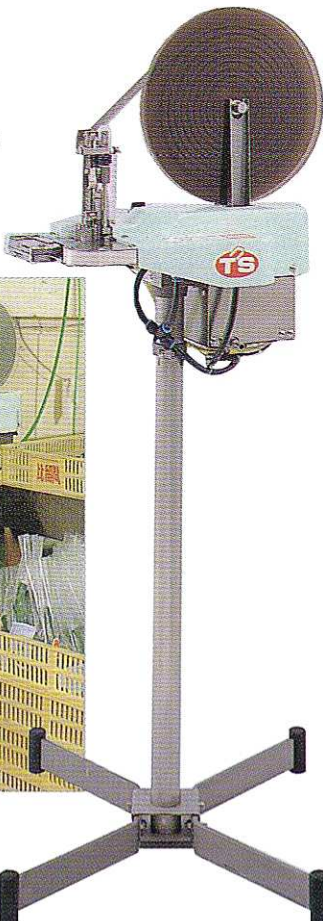


### TS712REEL

2,000 Staples per Reel

### TS715REEL

1,600 Staples per Reel

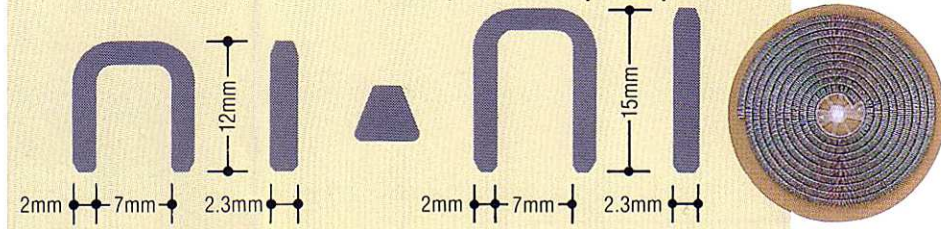

## SPECIFICATIONS

Item No.	HR-AVII/TS
Sizes	355W×495L×670~730H(mm)
Weight	19kg
Staples	TS712Reel, TS715Reel
Loading capacity	2,000Staples
Air pressure	5~6kg/cm <sup>2</sup> (Regulator gauge) Standard regulator gauge at 5.5kg/cm <sup>2</sup>
Hose	Inside diameter 8.5mm
Accessory	1-pc. Wheel unit · 1-pc. Wheel · 1-pc. Airpackner oil · 5m Airhose unit with coupler 10m Airhose unit with coupler · 1-pc. Air duster, 1-pc. Wrench · 1-pc. Airchuck TS-03 · 1-pc. AirPlug JS-03