# uperfinisher...



## NF665A/15

Drives 32 to 65mm(1-1/4" to 2-1/2") length Finish nails

#### **FEATURES**

- ■Lightweight-only 1.8kg & Slim body Compact and well balanced body. Easily reaches tight spots.
- Sequential fire mechanism The tool can be contact or single fired with switch lever.





Dial adjustable depth

Dial depth control requires no special tools.

Easy jam clearance system





Belt hook


Easy twist adjustable exhaust deflector

Exhaust air can easily be diverted 360° away from user without any tool.



- Door and window casings
   Plywood, decorative boards, and other interior finish works 
  Panel assembly and mouldings
- Sub flooring
   Furniture assembly, case back fastening, blind pinning and other finishing work 

  Cabinet assembly







subject to change without advance notice due to our continuous efforts to improve the quality of our products


The specifications and design of the products in this catalogue will be





### OOL SPECIFICATIONS

| PRODUCT NO.                                 |  | NF665A/15                                       |  |  |
|---|--|---|--|--|
| DIMENSIONS                                  |  | 322(H)×94(W)×322(L)mm (12-5/8°×3-3/16'×12-5/8') |  |  |
| WEIGHT                                      |  | 1.8kg (3.97lbs)                                 |  |  |
| RECOMMENDED<br>OPERATING PRESSURE           |  | 5 to 7 bar (70 to 100 p.s.i.)                   |  |  |
| LOADING CAPACITY                            |  | 100 brads                                       |  |  |
| AIR CONSUMPTION                             |  | 2.74(0.096ft³) at 7 bar operating pressure      |  |  |
| TECHNICAL<br>DATA NOISE                     | A-weighted single-event<br>sound power level | LWA,1s, d 85.5dB<br>LpA,1s, d 79.4dB            |  | These values are determined and documented in accordance to EN12549 1999 |
|   | A-weighted single-event sound pressure level |   |  |  |
| VIBRATION<br>Vibration characteristic value |  |   | These values are determined and documented accordance to ISO 8662-11 |  |

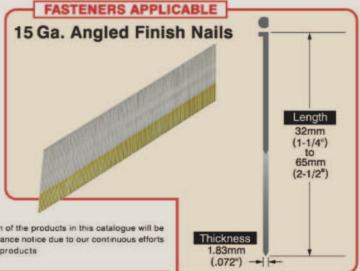



Sole NZ Distributor fastening solutions

AUCKLAND 34 Lansford Cres 3/94 Newton Rd Avondale Ph 09 828 2019 Ph 07 575 0088 Fax 09 828 2017 Fax 07 575 6546 Fax 03 358 8930

TAURANGA Mt Maunganui

CHRISTCHURCH 3 Industry Ave Waterloo Park Ph 03 358 8135

www.sifco.co.nz sales@sifco.co.nz

OS7230NZ