

# SuperDecker™




## CN665D-ST

drives 38mm - 64mm flat wire welded nails and  
drives 32mm - 64mm flat plastic sheet collated nails

### FEATURES

- Lightweight-only 2.7kg (6.2 lbs)
- Powerful
- Special sequential safety mechanism

To drive fasteners, first depress the contact arm, then pull and hold the trigger. The tool cannot fire a second nail until the trigger is released and the tool can cycle. This is a superior safety feature.

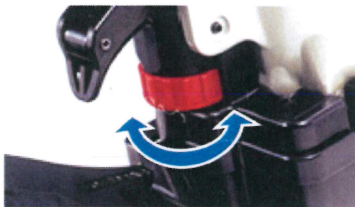



- Dial adjustable depth control  
Dial depth control requires no special tools.



- Easy twist adjustable exhaust deflector  
Exhaust air can easily be diverted 360° away from user without any tool.



- Maintenance free end cap filter (DEU Patent 19539950, UK Patent 2294412)  
It prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a self-cleaning feature; foreign substances are ejected automatically from the tool when the air hose is disconnected.



- Comfortable rubber grip
- No-mar contact tip included
- High durability piston unit (optional part) is available for concrete furring application

### APPLICATIONS

- Sheathing ● Subfloors ● Roof decking ● Exterior decks
- Siding ● Fencing ● Exterior trim ● Furring ● Strapping

### TOOL SPECIFICATIONS

MODEL	CN665D-ST
WEIGHT	2.7kg (6.2lbs)
DIMENSIONS	321(H)×130(W)×277(L)mm 12-5/8"×5-1/8"×11"
LOAD CAPACITY	300 nails
OPERATING PRESSURE	5~7kg/cm² (Regulator) 70~100 p.s.i.
AIR CONSUMPTION	1.2 l/cycle at 6 bar(90 p.s.i.) operating pressure
NOISE	A-weighted single-event sound power level LWA, 1s, d 97.45dB A-weighted single-event emission sound pressure level at work station LpA, 1s, d 88.00dB These values are determined and documented in accordance to CEN/TC 255 WG 1 N 45.3 E. (EN-standard in preparation)
VIBRATION	Vibration characteristic value = 3.45m/s² These values are determined and documented in accordance to ISO 8662-11

### FASTENERS APPLICABLE

15 degree flat wire welded nails	15 degree flat plastic sheet collated nails.
<p>Head diameter 5mm - 6mm</p> <p>Nail length 38mm - 64mm</p> <p>Shank diameter 2.3mm - 2.5mm</p> <p>Smooth Screw and Ring Shank</p>	<p>Head diameter 5mm - 6mm</p> <p>Nail length 32mm - 64mm</p> <p>Shank diameter 2.3mm - 2.5mm</p> <p>Smooth Screw and Ring Shank</p>

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



Sole NZ MAX Distributor:

**SIFCO**  
fastening solutions

**AUCKLAND**  
34 Lansford Cres  
Avondale  
Ph 09 828 2019

**TAURANGA**  
3/94 Newton Rd  
Mt Maunganui  
Ph 07 575 0088

**CHRISTCHURCH**  
3 Industry Ave  
Waterloo Park  
Ph 03 358 8135

sales@sifco.co.nz

www.sifco.co.nz

OS945NZ

## APPLICATIONS FOR THE MAX® CN665D-ST SUPERDECKER COIL NAILER

<u>Application Area</u>	<u>Product Code</u>	<u>Length &amp; Description</u>	<u>Nails/Coil</u>	<u>Box Size</u>
<b>WIRE COLLATED NAILS - BRIGHT STEEL, GALVANISED AND STAINLESS STEEL</b>				
Treated Ply bracing (Ecoply™)	AC45R287HDGAL	45x2.87mm Hot dip galv/ring shank	250	6,000
	AC50R280HDGAL	50x2.80mm Hot dip galv/ring shank	250	6,000
	C50R280SS	50x2.80mm Stainless/ring shank	225	3,600
	C64R280SS	64x2.80mm Stainless/ring shank	225	3,600
Timber fencing	AC57R250HDGAL	57x2.50mm Hot dip galv/ring shank	250	6,000
	AC64R250HDGAL	64x2.50mm Hot dip galv/ring shank	250	6,000
	AC64R287HDGAL	64x2.87mm Hot dip galv/ring shank	250	6,000
Flooring	AC64R250HDGAL	64x2.50mm Hot dip galv/ring shank	250	6,000
	AC64R28GAL	64x2.87mm M galv/ring shank	250	6,000
	C64R280SS	64x2.80mm Stainless/ring shank	225	3,600
Exterior cavity battens	C50R280SS	50x2.80mm Stainless/ring shank	225	3,600
Linea - secret nailed, Shadowclad™, Harditex™/Hardibacker™	C64R280SS	64x2.80mm Stainless/ring shank	225	3,600
20mm Decking - Kwila	C57R250SS	57x2.50mm Stainless/ring shank	225	3,600
20mm Decking - Pine & Cedar weatherboard	C64R250SS	64x2.50mm Stainless/ring shank	225	3,600
<b>PLASTIC COLLATED GKN NAILS 7000 HOUR SALT TESTED - RUST RESISTANT</b>				
Soffits	FSP32V5-GKN	32x2.50mm Screw shank	200	6,000
Anchor plates/metal strap				
Treated ply bracing, Linea™ - secret nailed Hardibacker	FSP50V5-GKN-OH	50x2.50mm Screw shank	200	8,000
Hardibacker™	FSP32V5-GKN	32x2.50mm Screw shank	200	6,000
<b>PLASTIC COLLATED HARDENED NAILS - GALVANISED, STAINLESS &amp; STAINLESS WITH WATERSEAL</b>				
Tile & slate underlay	FAP32V5-H	32x2.50mm Screw shank E galv.	200	6,000
20m battens to masonry, metal ceiling battens, metal joist hangers, Villaboard	FAP38V5-H	38x2.50mm Screw shank E galv.	200	6,000
	FAP45V5-H	45x2.50mm Screw shank E galv.	200	6,000
35mm battens to masonry	FAP50V5-H	50x2.50mm Screw shank E galv.	200	6,000
Axon™, Linea™ to Hardibatten™	FAP38V5-SS	38x2.50mm Screw shank stainless	200	6,000
	FAP45V5-SS	45x2.50mm Screw shank stainless	200	4,000
	FAP50V5-SS	50x2.50mm Screw shank stainless	200	6,000
<b>PLASTIC COLLATED HOT DIP GALVANISED AND STAINLESS STEEL NAILS</b>				
Metal garage cladding	FSP32V8HDGAL/6	32x2.80mm screen shank HDGAL	200	6,000
Metal garage cladding	FSP40V8HDGAL/6	40x2.80mm screw shank HDGAL	200	6,000
Coloursteel™ roof tiles	FSP50V5HDGB	50x2.50mm screw shank HDGAL	200	6,000
Ecoply™ barrier/bracing	FRP50V8HDGAL/6	50x2.80mm ring shank HDGAL	200	6,000
20mm Decking Kwila/Pine	FRP60V5SS	60x2.50mm ring shank stainless	200	3,600
Fencing/Decking	FRP60V5HDGAL	60x2.50mm ring shank HDGAL	200	6,000

Aug-19