

MAX

BUILDING OUR WORLD

SuperFramer

SN890CH3/34-ST

34 DEGREE OFFSET/CLIPPED HEAD FRAMING NAILER

FEATURES




● Unique tangle free swivel joint

No more fighting with heavy hoses no matter what angle the nailer is held.




● Maintenance free end cap filter (US Patent 5637125)

Maintenance free end cap filter prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a self-cleaning feature; Foreign substances are ejected automatically from the tool when the air hose is disconnected.

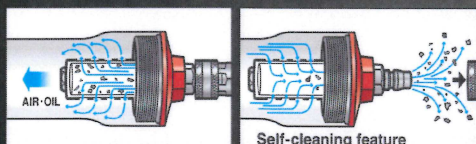

● Heavy duty rafter hook



● New ANSI Compliant Trigger System

The tool comes from the factory with a sequential trigger installed.



Tangle free swivel fitting



Rafter hook



Self cleaning filter




Trigger lock lever



Depth control

● Dial adjustable depth control

Dial depth control requires no special tools.



Depth guide

● Compact design

30% shorter than conventional tools at 435mm in height. Allows the user to fit the tool into tighter spaces.

● Pointy teeth on contact arm

Pointy teeth on contact arm allows the user to get a firm grip when toe-nailing.




APPLICATIONS

- Framing ● Sheathing ● Subfloors ● Decking
- Siding ● Crating

TOOL SPECIFICATIONS

MODEL	SN890CH3/34-ST
WEIGHT	3.3kg
DIMENSIONS	316mm x 121mm x 435mm
LOAD CAPACITY	90 nails
OPERATING PRESSURE	70 - 100 psi (Regulator) 5-7 bar
AIR CONSUMPTION	2.18L/cycle (90psi operating pressure)

FASTENERS APPLICABLE

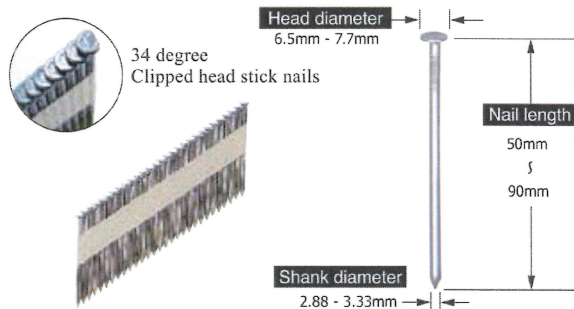

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

SIFCO

fastening solutions

AUCKLAND
34 Lansford Cres
Avondale
Ph 09 828 2019
Fax 09 828 2017
Email: sales@sifco.co.nz

TAURANGA
3/94 Newton Rd
Mt Maunganui
07 575 0088
07 575 6546

CHRISTCHURCH
3 Industry Ave
Waterloo Park
03 358 8135
03 358 8930

OS953NZ

www.sifco.co.nz