





SJK.16


USE, MAINTENANCE & SPARE PARTS MANUAL



TECHNICAL DATA		Cod. 1142600
Usable lengths mm	4 ÷ 16	Type of Fastener SJK   Crown: .154" (5/32") Thickness: .022" Width: .030" Gauge: 23
Magazine capacity, no. of fasteners	170	
Working pressure	4 ÷ 6 bar 60 ÷ 90 psi	
Air consumption litres/shot	0.13	
Weight kg	0.90	
Dimensions mm	216 x 43 x 148	
Sound pressure at work station EN 12549:1999 ISO 11201:1995	84.3 dB(A)	
Emitted sound power EN 12549:1999 ISO 3744:1994	93.7 dB(A)	
Weighted mean value of vibration on the grip EN 28662:1992 ISO 5349:1986 ISO 8662-11	<2.5 m/s ²	February 2017

SPARE PARTS

Cod.	Description
00.06	O-Ring
00.12	O-Ring
00.13	O-Ring
00.14	O-Ring
00.26	O-Ring
00.27	O-Ring
00.35	O-Ring
01.21.1	Gasket
01.21.3	Gasket
01.29	O-Ring
01.33	O-Ring
04.06.5	Screw
04.10	Screw
04.12	Screw
04.16	Screw
04.20	Screw
04.35	Screw
07.05	Ball
07.30	Hex. bar wrench
09.02	Elastic ring
14.18.1	Pin
20.00	Body
22.07	Head
24.00	Silencer
25.04	Exhaust deflector
26.07	Cylinder
28.00	Gasket
30.07.3	Piston
32.05	Bumper
39.00	Exhaust gasket
40.04.2	Valve ass'y
45.04	Ring
54.03	Trigger valve
55.06	Bush
70.04	Guard
72.03.3	Support
76.04	Pin
76.14	Pin
76.45	Pin
80.08	Trigger
81.09	Trigger
81.15	Safety
90.07	Spring
90.10	Spring
91.03X	Spring
92.01X	Spring
22.00.41	Driver
53.00.41	Magazine
62.00.41	Slider
72.00.41	Pusher
81.00.80	Nose
91.00.41	Nose plate

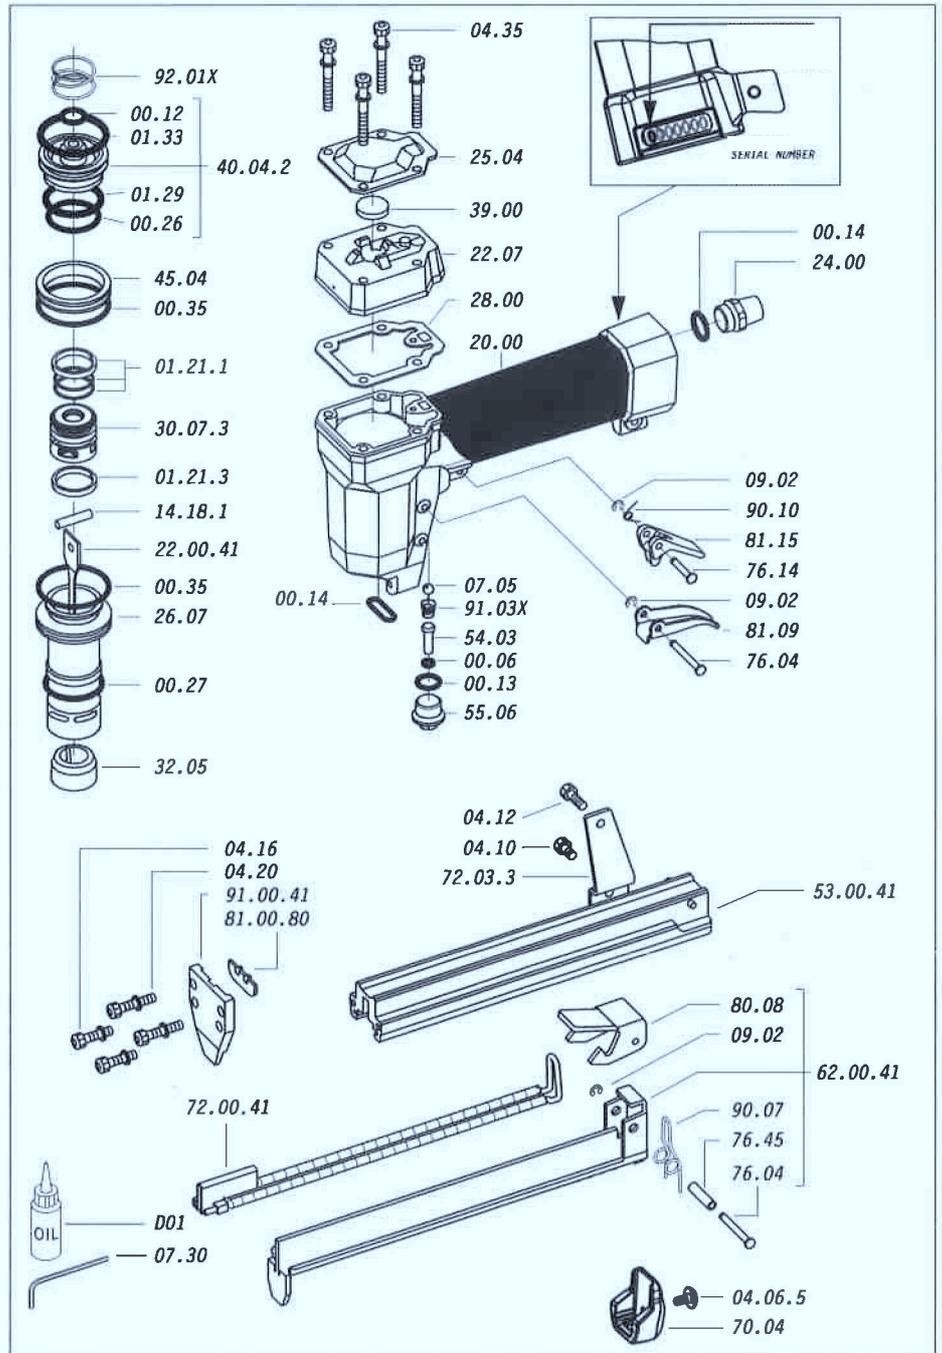

O-RINGS

