

PowerLite™ Framer HN90F-ST

The 20 bar technology was first introduced by MAX in Japan in 1994 and is now available

FEATURES

- Sequential fire mechanism

- New design recoil reduced valve (Patent Pending)



- Dial adjustable depth control



Only **2.6kg**

- Reduced Exhaust Air System Side exhaust with built-in silencer



- Trigger Lock Dial for safety


- Maintenance free end cap filter (DEU Patent 19539950) (UK Patent 2294412)



- Unique tangle free swivel fitting



Comes with plastic carry case

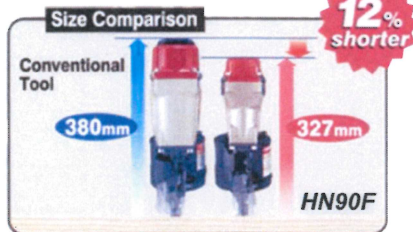

TOOL SPECIFICATIONS

MODEL	HN90F-ST
WEIGHT	2.6kg
DIMENSIONS	331mm(H) x 126mm(W) x 298mm(L)
LOAD CAPACITY	300 nails
OPERATING PRESSURE	12 to 23 bar (170 to 320 p.s.i.)
AIR CONSUMPTION	3.4/cycle at 18 bar (257 p.s.i.) operating pressure
NOISE	A-weighted single-event sound power level LWA, 1s, d 93.1 A-weighted single-event emission sound pressure level at work station LpA, 1s, 81.7 These values are determined and documented in accordance to CEN/TC 255 WG 1 N 45.3 E. (EN-standard in preparation)
VIBRATION	Vibration characteristic value - 4.6m/s ² These values are determined and documented in accordance to ISO 8662-11

FASTENERS APPLICABLE

15 degree flat wire welded nails



Head diameter 6.0 to 7.7mm

Smooth Screw and Ring Shank

Nail length 45 to 90mm

Shank diameter 2.5 to 3.8mm

(Screw Shank 2.5mm to 3.3mm)

15 degree flat plastic sheet collated nails




Head diameter 5.5 to 7.7mm

Smooth Screw and Ring Shank

Nail length 45 to 75mm

Shank diameter 2.5 to 2.9mm

For the **PowerLite Framer HN90F** operation, the **PowerLite Compressor** and **PowerLite Hose** are required.

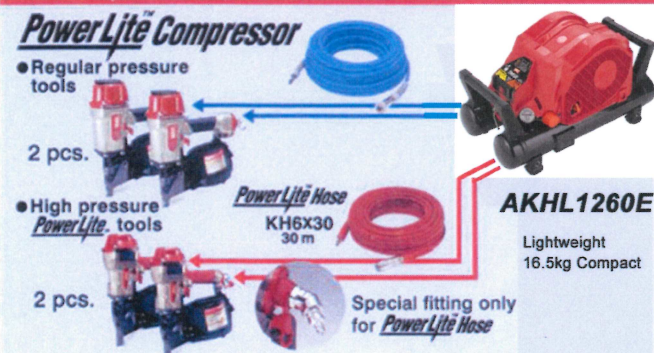

COMPRESSOR SPECIFICATIONS

MODEL	AKHL1260E
DIMENSIONS	330mm(H) x 320mm(W) x 580mm(L)
WEIGHT	16.5kg
MAX WORKING PRESSURE	29 bar
POWER SUPPLY	230 V / 50 Hz
RATED CURRENT	6 A
MOTOR POWER	2 HP
TANK VOLUME	0.4 L (50L equivalent tank size as 10 bar model)
RATED SPEED	2,200 - 3,150 rpm

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products



Sole NZ Distributor
SIFCO
fastening solutions

AUCKLAND
34 Lansford Cres
Avondale
Ph 09 828 2019

TAURANGA
3/94 Newton Rd
Mt Maunganui
Ph 07 575 0088

CHRISTCHURCH
3 Industry Ave
Waterloo Park
Ph 03 358 8135

www.sifco.co.nz
sales@sifco.co.nz

OS7413ANZ