





3G.16SL

USE, MAINTENANCE & SPARE PARTS MANUAL




TECHNICAL DATA		
Lengths mm	4 ÷ 16	Type of Fastener 3G  0,55x0,75  Crown: .350" (11/32") Gauge: 23
Magazine capacity	185	
Operating pressure	4 ÷ 6 bar 60 ÷ 90 psi	
Air consumption litres/stroke	0.18	
Weight kg	1.00	
Dimensions mm	223 x 43 x 198	
Sound pressure in operator's position	81 dB(A)	
Sound power emitted	88 dB(A)	
Vibratory emissions on handle	<2.5 m/s ²	Dec 2021

SPARE PARTS

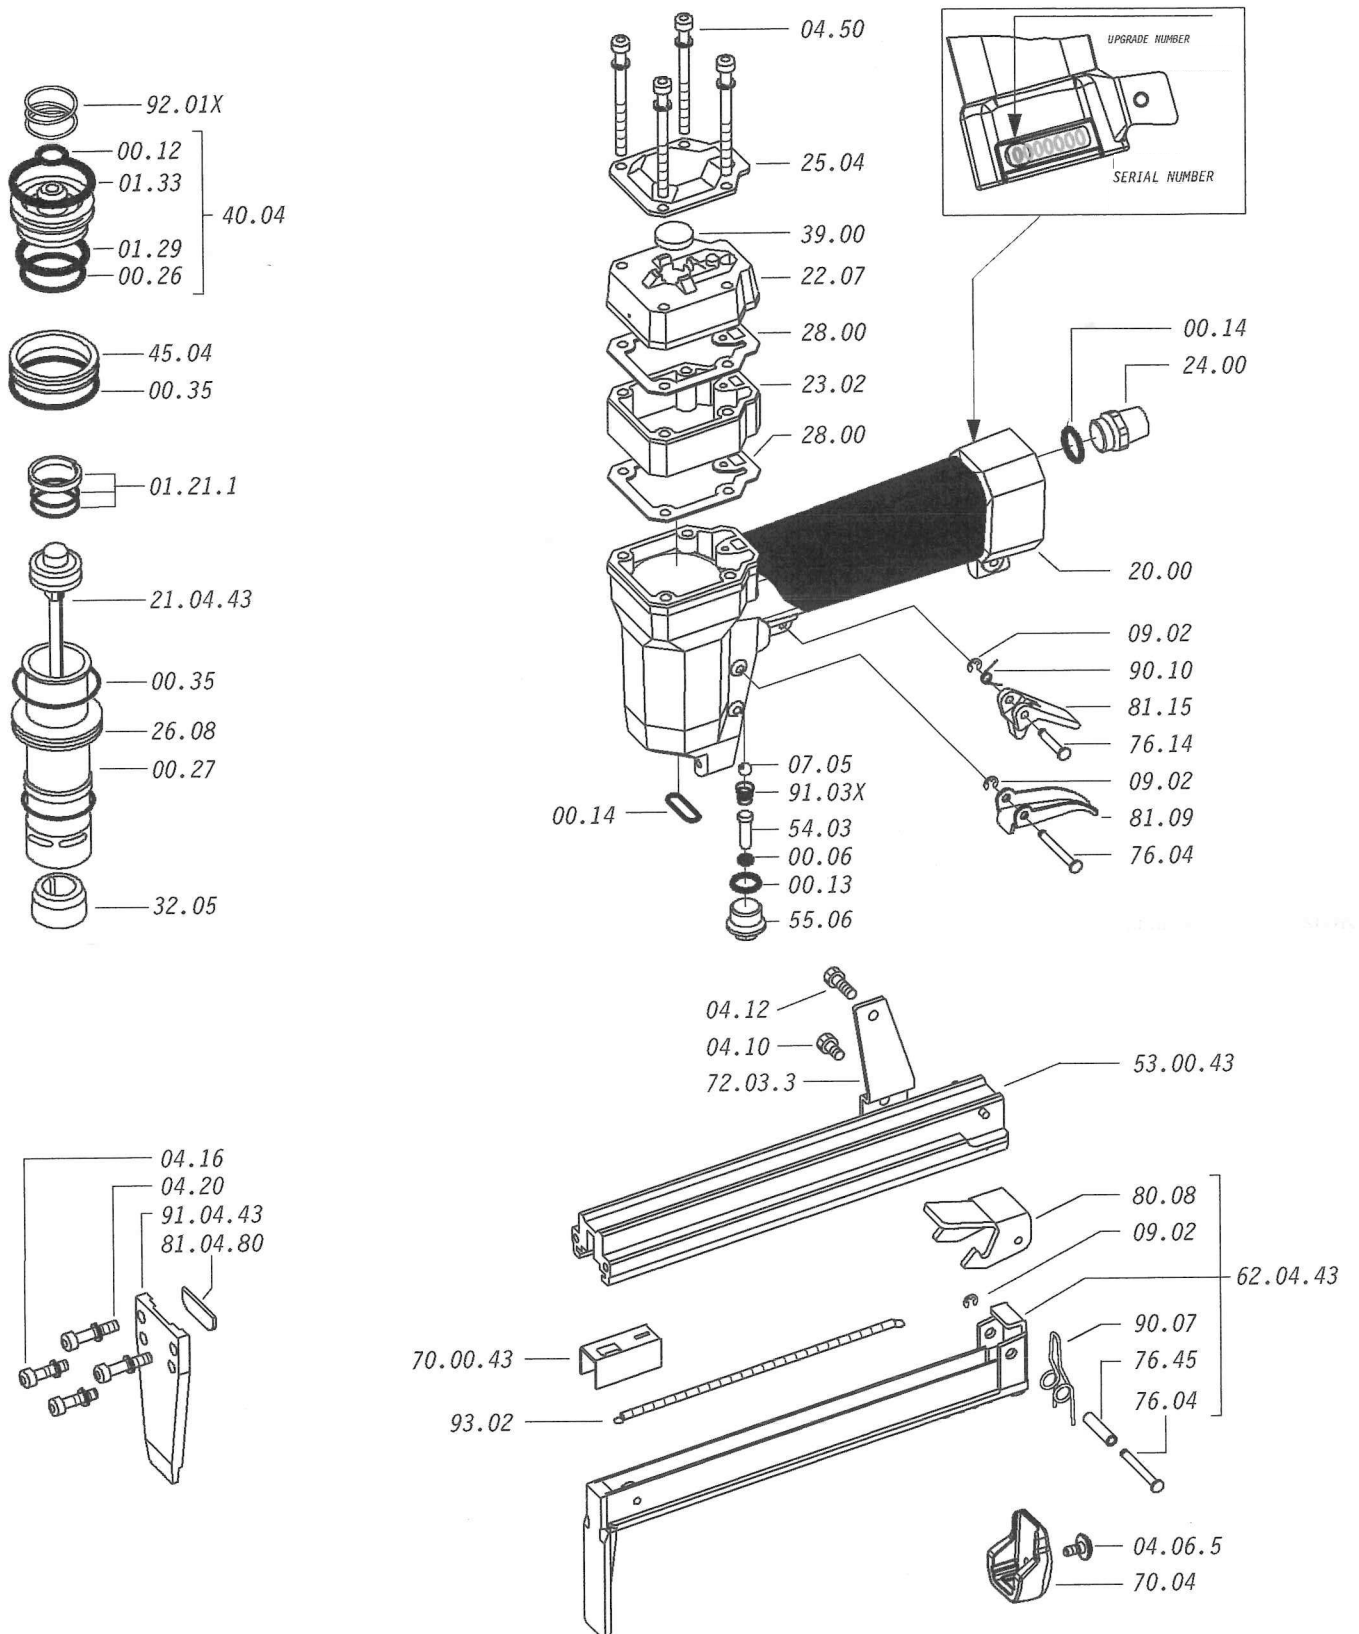

EQUIPMENT







3G.16 SL

SPARE PARTS

Cod.	Description
00.04	O-Ring
00.06	O-Ring
00.12	O-Ring
00.13	O-Ring
00.14	O-Ring
00.26	O-Ring
00.27	O-Ring
00.35	O-Ring
01.21.1	Gasket
01.29	O-Ring
01.33	O-Ring
04.06.5	Screw
04.10	Screw
04.12	Screw
04.16	Screw
04.20	Screw
04.50	Screw
07.05	Ball
07.30	Hex. bar wrench
09.02	Elastic ring
20.00	Body
22.07	Head
23.02	Extension
24.00	Silencer
25.04	Exhaust deflector
26.08	Cylinder
28.00	Gasket
32.05	Bumper
39.00	Exhaust gasket
40.04	Valve ass'y
45.04	Ring
54.03	Trigger valve
55.06	Bush
70.04	Guard
72.03.3	Support
76.04	Pin
76.14	Pin
76.45	Pin
80.08	Trigger
81.09	Trigger
81.15	Safety
90.07	Spring
90.10	Spring
91.03X	Spring
92.01X	Spring
93.02	Spring
21.04.43	Driver
53.00.43	Magazine
62.04.43	Slider
70.00.43	Pusher
81.04.80	Nose
91.04.43	Nose plate
D01	Oiler

O-RINGS

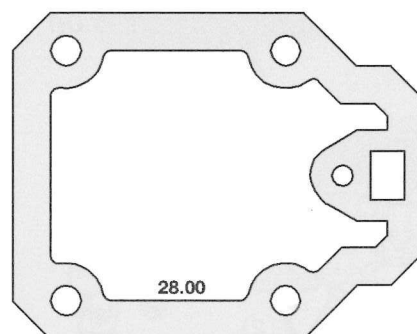

00.04



00.06




00.12




00.13




00.14



00.26



00.27



00.35

00.70.5

December 2021

3G.16.SL