

MAX**PowerLite™**

PowerLite™ 500PSI Compressor

AKHL1260E

Ultra Lightweight
16kg

DC-Brushless motor with an Inverter circuit allows start up in freezing temperatures and also functions in poor electric supply conditions down to 70 volts without tripping the circuit breaker.

Quiet Mode

is suitable for facility maintenance jobs which require quiet operations (i.e hospitals, schools, etc.)

4 Air Outlets

2 outlets for High Pressure tools
2 outlets for 100psi tools



LED Control Panel

alerts you of the following situations:

- Maintenance (1,000 hours operating time)
- Service required
- Low voltage
- High voltage
- High motor/ control circuit temperature

Easy Drain Lever

PowerLite™ 500PSI Compressor


AKHL1260EX

22 litre Large Capacity Air Tank

Suitable for rapid fire applications like floor decking.


Easy Detachable Tank

Easily convert to 2 tank model (AKHL1260E) by removing 4 screws.

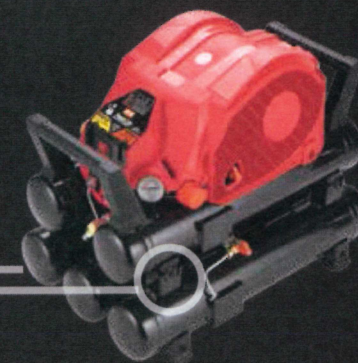

CONTINUOUS FASTENING ABILITY*

*Number of nails were counted until the nail was no longer flush.
*45 sec. interval time was taken for replacing a coil of nails.

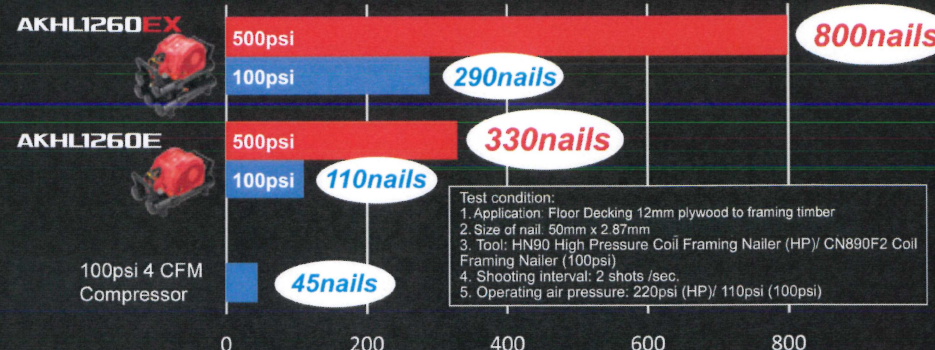

500PSI PowerLite ACCESSORIES

Air Tank



AKTH13
(ONLY for AKHL1260E)
It connects to the AKHL1260E to increase the capacity of air volume.

Air Hose



KH6x30
(30 metres)



SD630A2
30 metres
KH6x30 high pressure hose with stainless steel hose reel

Splitter MFF



ARC-HI

SIFCO®

fastening solutions

AUCKLAND
34 Lansford Cres
Avondale
Ph 09 828 2019

TAURANGA
3/94 Newton Rd
Mt Maunganui
07 575 0088

CHRISTCHURCH
3 Industry Ave
Waterloo Park
03 358 8135

Email sales@sifco.co.nz

www.sifco.co.nz

OS944NZ

Item#:	AKHL1260E	AKHL1260EX
Weight:	16kg	23kg
Dimensions(LxWxH):	58 x 32 x 33	58 x 38 x 46
Tank Capacity:	9 litre	22 litre
Horse Power:	2HP	
Power Supply:	230 V±10%50Hz±1%	
Noise:	67.5 db (Normal mode) 66.4 db (Quiet mode)	
Rated Current:	12A	
Motor RPM:	2,900 (Normal mode) 1,600 (Quiet mode)	
Air Displacement:	3.4 CFM @100PSI 2.6 CFM @300PSI	