

FLATCLINCH

**HEAVY DUTY SPEEDY
ELECTRONIC STAPLER
EH-70F**


**Comes with
one free
staple
cartridge!**

MAX



Staples 2 to 70 Sheets without changing the staple.

**Innovative electronic stapler
for rapid Professional-Quality stapling!**

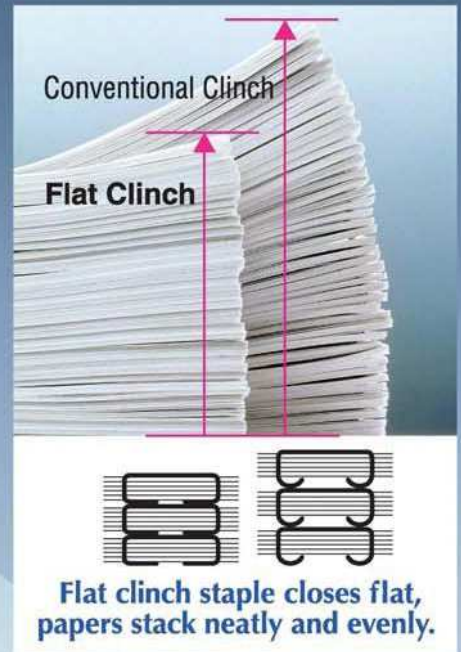

**NEW PRODUCTS PLAN
EH-70F**

- **Staples 2 to 70 sheets
without changing staple**
- **Patented side-by-side
Flat Clinch Mechanism**
- **Quiet motor driven mechanism**
- **Manual & Auto Stapling**
- **Fast and Heavy Duty Stapler**



Ideal Heavy Duty electronic stapler for busy mail rooms, copy centers and offices, featuring a durable metal frame and quiet motor-driven mechanism.



- 1 Patented side-by-side Flat Clinch Mechanism;** enables you to staple from 2 to 70 sheets of 64 gsm / 16-lb bond paper without changing the staple (US Pat.5,029,745)



- 2 Easy, Snap-in 5,000 staple cartridge;** lets you staple 5,000 times continuously for your heavy duty requirements. (Use Max No.70FE staple cartridges only)




- 3 Clear Case;** allows you to see the actual stapling position.



- 4 Adjustable Throat Depth;** for ideal stapling position from 6 to 18 mm (1/4" to 3/4")




- 5 Manual Button & Moveable Slide;** for edge stapling. Stapling depth from 3 to 18 mm (1/8" to 3/4")



- 6 LED Status Lamp;** is activated when the staple cartridge becomes empty.



- 7 Unique Paper Guide (45 degree);** allows you convenient corner stapling. Adjustable stapling depth from 12 to 26 mm (1/2" to 1-1/32")

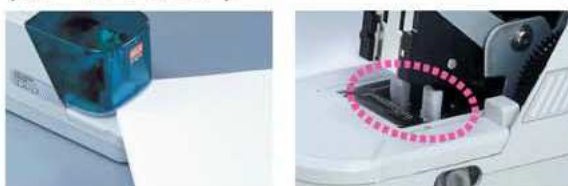


SPECIFICATIONS

Model name	MAX Electronic Stapler EH-70F
Capacity	2-70 sheets(64gsm,55kg/16-lb.bond paper)
Stapling speed	2 staples per second
Stapling system	Motor driven link mechanism with automatic feed
Throat depth	Auto stapling : Adjustable approx. 6 to 18 mm(1/4" to 3/4") Manual stapling : Adjustable approx. 3 to 18 mm(1/8" to 3/4")
Dimensions	100mm(4")W×112mm(4-1/2")H×210(8-1/4")L
Weight	1.2Kg (2.7lbs)
Power consumption	Approx.13W
Power source	DC24V,2.1A Use only specified AC adapter (AC100-240V, 50-60HZ) appended to machine.
Working Temp and Humidity ranges	5°C/41°F -35°C/95°F, Below 80% HR(non-condensation)
Staple cartridge	MAX No.70FE staple cartridge Contains a guaranteed minimum of 5,000 staples.

MAX STAPLE No.70FE

Actual staple size



The specifications and design of the products in this catalogue will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



Sole NZ distributor:
SIFCO
fastening solutions

AUCKLAND
34 Lansford Cres
Avondale
Ph 09 828 2019
Fax 09 828 2017

TAURANGA
3/94 Newton Rd
Mt Maunganui
07 575 0088
07 575 6546

CHRISTCHURCH
3 Industry Ave
Waterloo Park
03 358 8135

Nationwide Email: sales@sifco.co.nz Website: www.sifco.co.nz

OS7610AN