

# PowerLite<sup>TM</sup> Locator HN65J2

## MAX PowerLite<sup>TM</sup> 400 psi system

MAX developed the world's first high-pressure pneumatic nailing system and introduced it to the Japanese market in 1994. For the past decade the MAX **PowerLite** 400 psi system has revolutionized the construction industry in Japan. Powered by 400 psi technology, the MAX **PowerLite** tools are approximately 40% lighter and 20% smaller than most competitors tools with sacrificing power. Now, the MAX **PowerLite** system is available in the NZ market. Experience the Next Generation in nailing technology with MAX.

### FEATURES

#### • Compact

Compared to 100 psi joist hanger tools, the HN65J2 is 40% more compact.



#### • Dial adjustable depth control




#### • Powerful

Enough power to shoot up to 63mm x 4mm nails

#### • New durable locator

Designed to find the hole easily and is extremely durable.



Only **2.1kg**


#### • Reduced Exhaust Air System

Side exhaust with built-in silencer.



#### • Trigger Lock for safety

#### • Maintenance free end cap filter (US Patent 5637125)

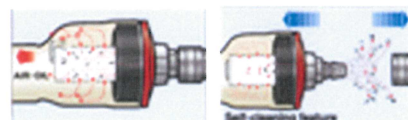

#### • Unique tangle free swivel fitting.



- 100 nail capacity, 38mm length nail, 63mm length nail.
- Easy adjustment for 38mm or 63mm nails.

### APPLICATIONS

#### TOOL SPECIFICATIONS

MODEL	HN65J2
WEIGHT	2.1kg
DIMENSIONS	30cm(H) x 11cm(W) x 30cm(L)
LOAD CAPACITY	100 nails
OPERATING PRESSURE	170 to 320 psi



Comes with plastic carry case

#### FASTENERS APPLICABLE

15 degree flat plastic sheet collated nails



100 nails per coil

Head diameter  
7mm

Smooth Shank  
Galvanised  
Ring Shank  
Stainless Steel

Nail length  
40mm - 65mm

Shank diameter  
3.4mm

## PowerLite<sup>TM</sup> Compressor AKHL1260E

For the **PowerLite** HN65J2 operation, the **PowerLite** Compressor and **PowerLite** Hose are required.

#### • Regular pressure tools



#### • High pressure PowerLite tools



PowerLite Hose  
10X100FT (100 feet)

Special fitting only for PowerLite Hose



Lightweight 16.2kg  
Compact

**PowerLite Compressor**  
AKHL1260E  
direct drive

#### COMPRESSOR SPECIFICATIONS

MODEL	AKHL1260E
DIMENSIONS	330(H) x 320(W) x 580(L)
WEIGHT	16.5kg
POWER SUPPLY	230V
RATED CURRENT	6A
PUMP	Oil-less direct drive
MOTOR POWER	2Hp
TANK	8.7L
RPM	2,200 - 3,150
AIR DISPLACEMENT	120L/min at 5 bar 105L/min at 15 bar 95L/min at 25 bar

The specifications and design of the products in this catalogue will be subject to change without advance notice due to our continuous efforts to improve quality of our products



Sole NZ Distributor  
**SIFCO**  
fastening solutions

AUCKLAND  
34 Lansford Cres  
Avondale  
Ph 09 828 2019

TAURANGA  
3/94 Newton Rd  
Mt Maunganui  
Ph 07 575 0088

CHRISTCHURCH  
3 Industry Ave  
Waterloo Park  
Ph 03 358 8135

www.sifco.co.nz  
sales@sifco.co.nz

OS924ANZ