



HT-R45C Tapener



INSTRUCTION MANUAL



WARNING

BEFORE USING THIS TOOL, STUDY THIS MANUAL TO ENSURE SAFETY WARNING AND INSTRUCTIONS.

KEEP THESE INSTRUCTIONS WITH THE TOOL FOR FUTURE REFERENCE.

JAN 2022

SPECIFICATIONS

<i>Name</i>	HT-R45C
<i>Dimensions</i>	148mm H x 353mm L x 35mm W
<i>Staples Used</i>	MAX STAPLES 604C-L (4,800 pcs) MAX STAPLES 604E-L (4,800 pcs)
<i>Number of Staples Loaded</i>	MAX STAPLES 604C-L 200 pcs/stick MAX STAPLES 604E-L 172 pcs/stick
<i>Tape Used</i>	MAX TAPE-10 WHITE, 0.1mm T x 11mm W x 40m L MAX TAPE-15 GREEN, 0.15mm T x 11mm W x 26m L MAX TAPE-25 RED, 0.25mm T x 11mm W x 16m L MAX TAPE-200R GREEN, 0.15mm T x 11mm W x 26m L (photolysis)
<i>Weight</i>	430 grams
<i>Bundling Limit</i>	Maximum 45mm ϕ
<i>Blade</i>	TC90045 MAX™ Cutter for Tapener Series
<i>Staple Dimensions</i>	<p>604C-L 604E-L</p> <p>0.3 6 0.5 0.3 6 0.6</p>


PARTS LIST

Index No.	Parts Code No.	Description
1	HT11778	B CASE S2
2	FF31714	STRAIGHT PIN 1714
3	FF31712	STRAIGHT PIN 1712
4	KK33402	TORSION SPRING 3402
5	KK29192	COMPRESSION SPRING 9192
6	HT11768	LOCK PLATE S2
7	HT11627	A CASE
8	CC43107	NAT M4(3)
9	AA05719	+PH TAP SCREW 3x8 (P)
10	HT11632	CLINCHER
11	HT11622	TAPE CATCH
12	HT11671	TAPE PLATE S
13	AA25537	SCREW BIND M4x6
14	HT11618	CLINCHER ARM
15	AA05716	SCREW BIND 4x6 (S-TIGHT)
16	HT11619	ARM SUPPORT
17	HT11637	B HANDLE
18	FF31713	STRAIGHT PIN 1713
19	HT11755	GRIP
20	KK13390	EXTENSION SPRING 3390
21	HT70106	MAGAZINE UNIT
22	FF31716	STRAIGHT PIN 1716
23	HT11761	PUSHER
24	HT11610	SPRING GUIDE ROD
25	KK29131	COMPRESSION SPRING 9131
26	HT11609	STAPLE COVER
27	TC90045	MAX CUTTERFOR TAPENER SERIES
28	KK34099	TORSION SPRING 4099
29	HT70070	TAPE GUIDE S UNIT
30	FF41740	STEP PIN 1740
31	HT11763	TAPE GUIDE SUPPORT S
32	HT11781	TAPE GUIDE BASE S2
33	FF31711	STRAIGHT PIN 1711
34	KK83018	CONICAL SPRING 3018
35	JJ10103	E-RING 3.2
36	HT11615	ROLLER
37	FF31643	STRAIGHT PIN 1643
38	FF31644	STRAIGHT PIN 1644
39	HT11754	DRIVER
40	HT11788	A HANDLE
41	HT11603	TAPE SPRING
48	AA05715	SCREW BIND 4x16 (P)
50	HT70097	TAPE HOLDER ASSY (HT-S)
51	HT70107	BOBBIN CASE ASSY
53	HT11669	RUBBER WASHER 1.7x6x2
55	HT11697	ARM SUPPORT S
57	HT70111	TAPE CATCH S2 ASSY
58	HT81017	A HANDLE ASSY
59	HT11762	BACKUP WASHER
60	KK34101	TORSION SPRING 4101
61	HT11766	JAM CLEARING STICK

HOW TO USE

How to Load Staples



1. Hold the body with one hand, push the lever down and pull the lever towards your direction.
* The pusher cannot be removed from the main body.
2. While holding the tool in one hand, insert staples into the magazine so that staples' legs point upward, and then set them in the pusher unit by sliding lever. You can load 604C type or 604E type staples.

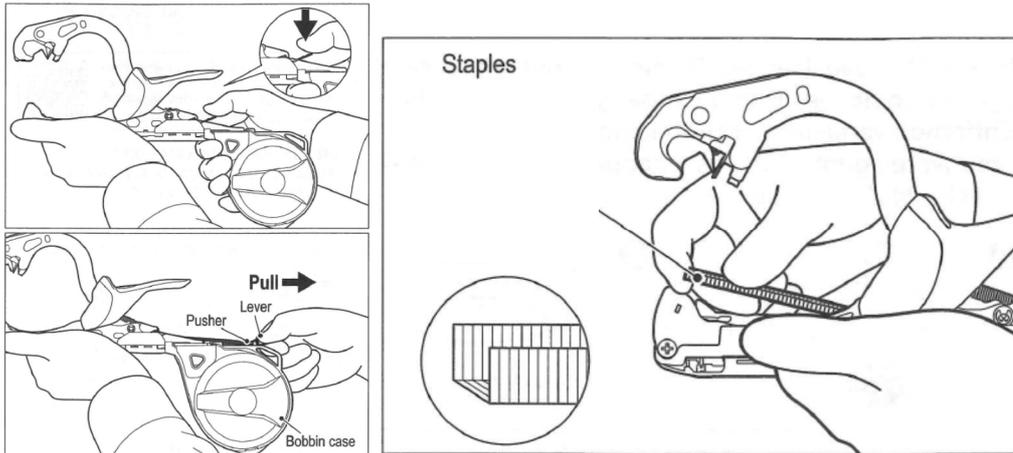



Caution

- Be sure to use MAX staples and MAX tape.
- NEVER place your fingers near the front end of the magazine unit because there is a serrated blade and the staple ejection port nearby.
- Do not insert a branch near the cutting blade. Doing so may damage the cutting blade or peripheral parts.

How to Open Tape Holder and Bobbin Case and Load the Tape

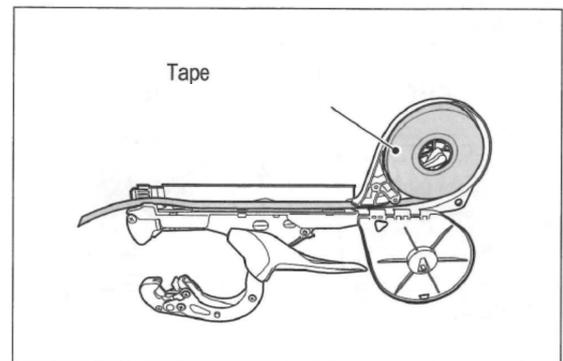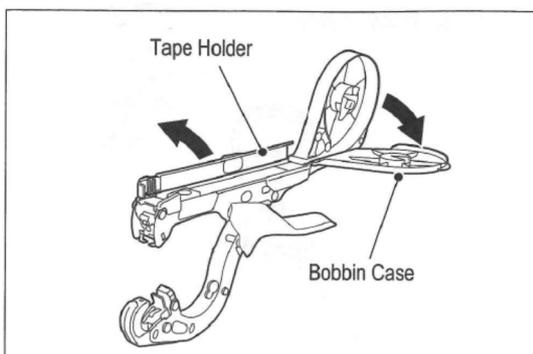



1. Open the tape holder and bobbin case, and insert the tape roll into the bobbin case.
2. Pull tape into the tape holder and make sure approximately 5cm of tape hangs out of the edge of the tape holder.
3. Load the tape through the two guides of the tape guide.

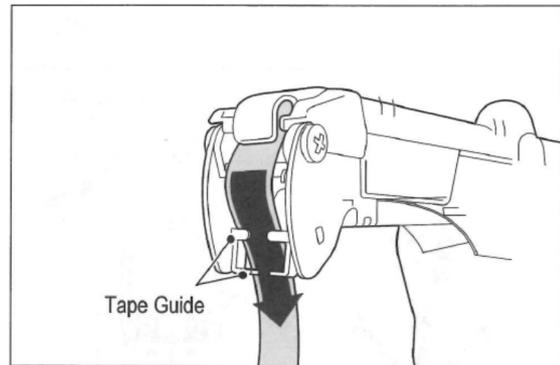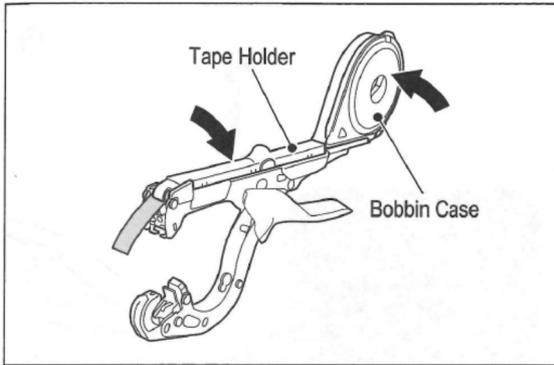

How to Pull Out Tape





1. Squeeze the handle so that the tape catch will catch the tape end deep enough.
2. Release the handle as explained. The tape will pull out.
3. If the tape catch unit does not catch the tape end when you squeeze the handle, please squeeze the handle harder several more times, and the tape catch will return to its normal position (this is not a trouble with the tapener).

Note: this should be done only when the tape catch does not catch the tape end.

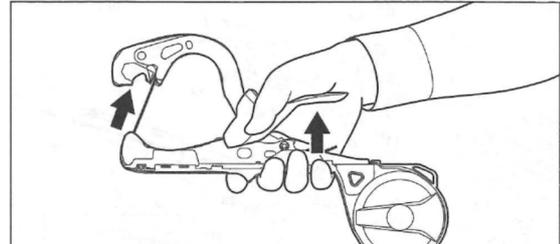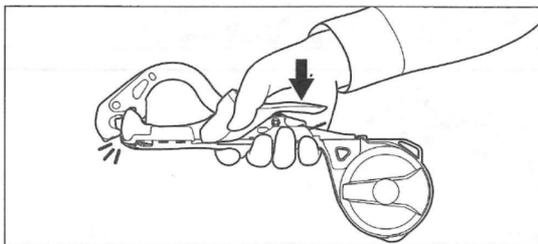

How to Bind Objects



1. Press the tape against the object until it is positioned inside the tapener.
2. Then fully squeeze the grip with the tape positioned centrally, and the object will be bound by both the tape and staple, simultaneously the tape is cut off.

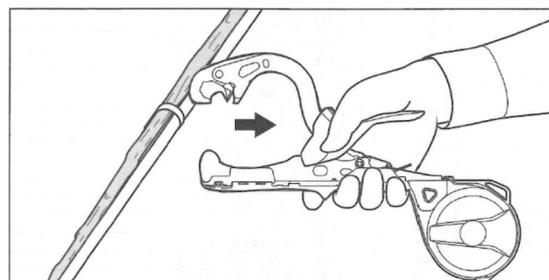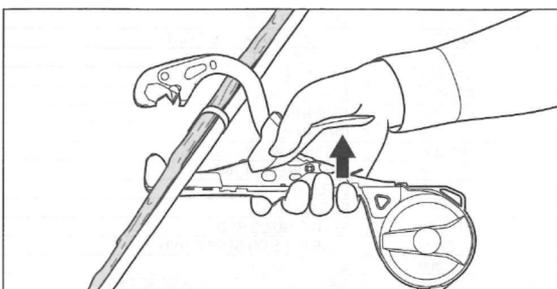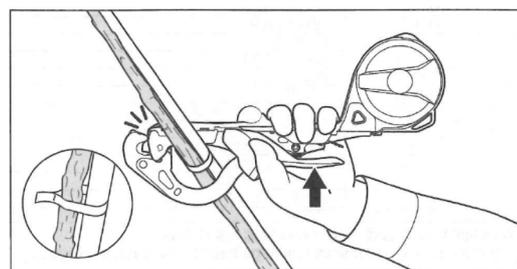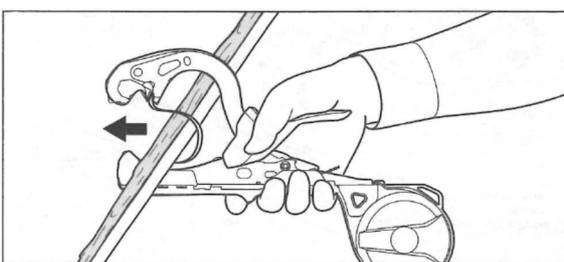

How to Change Blade




Preparation

1. Do not remove the cap from the blade.
2. Remove the tape and staples.
3. Open the arm and tape holder cover,
4. Hold the main body with one hand.

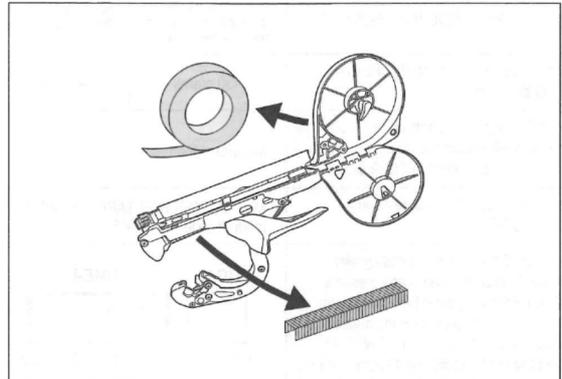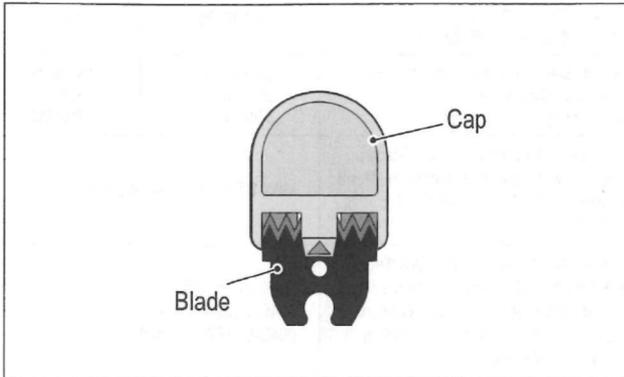

Change the Blade

1. Press the button and pull out the old cutting blade.
2. Press the button and push the cutting blade cap deep enough so that three triangles are aligned (correct position shown in the figure).
 - Release the button and pull off the cutting blade cap.


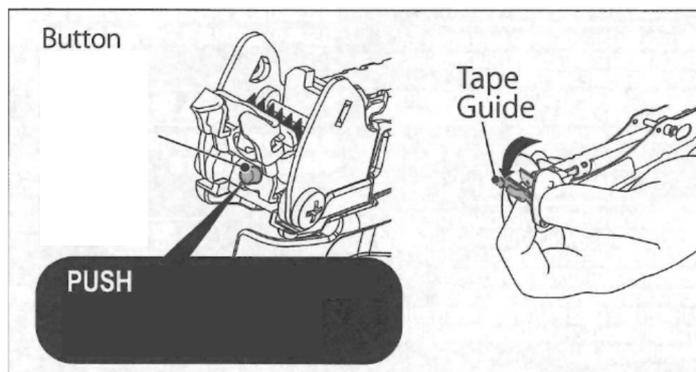
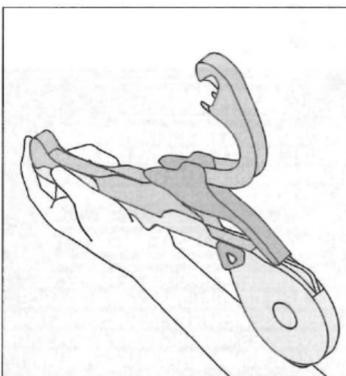
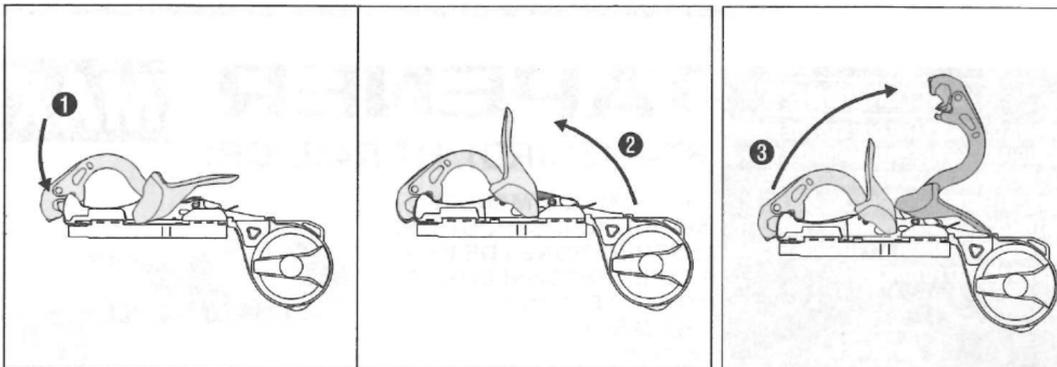


WARNING

- **Keep your fingers away from the cutting blade.**
- **Confirm that the round hole of the cutting blade is completely hidden.**



How to Replace Serrated Blades



1. Use fine pliers to remove old blade.
2. Insert new blade (TC90045) using blade holder supplied with blades.
3. Keep pushing until blade is secured by red button.

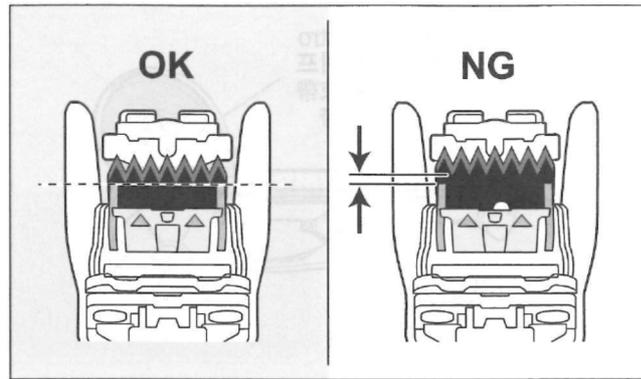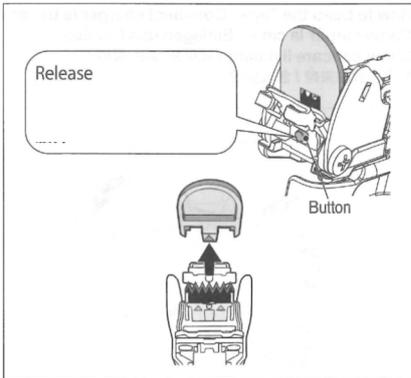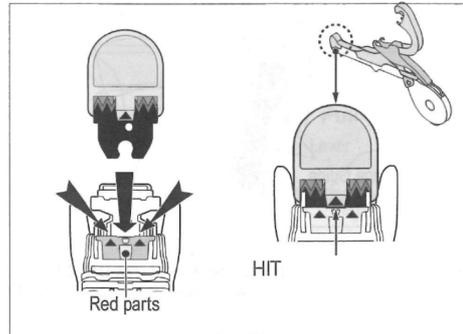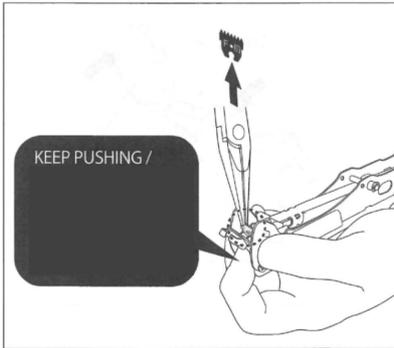

How to Remove Jammed Staples

While the pusher unit is open, remove any loaded staples, and then remove the stuck staple with a small screwdriver.

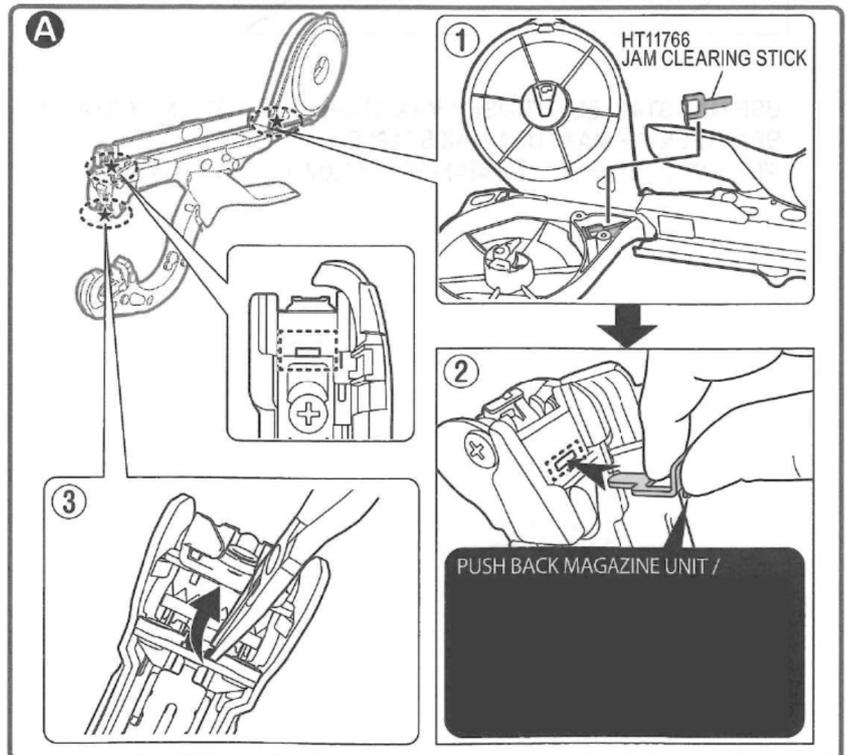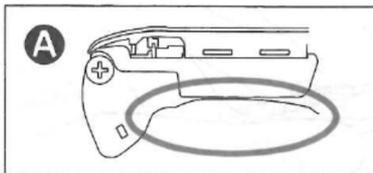

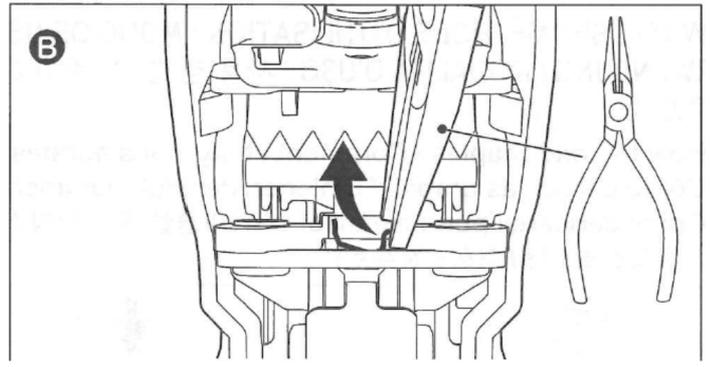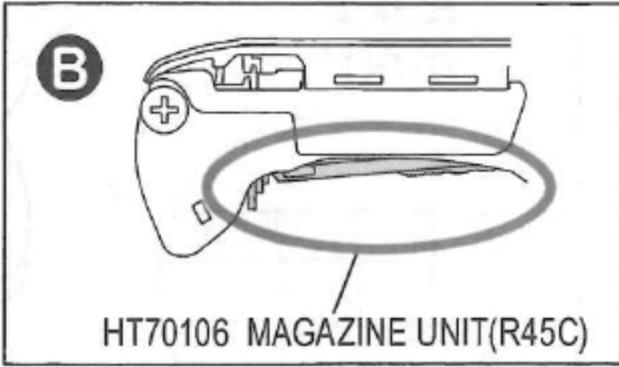

AFTER USE

In order to maintain proper performance, apply oil to the specified locations after each use.

