

PowerLiteTM Framer

MAX



CE

HN100-ST

MAX's New
**Compact
Powerful
Lightweight**
Coil Framer



20 Next Generation Nailers Powered by
bar technology

PowerLite Framer
NAIL LENGTH PLASTIC SHEET COLLAGE-10-20
WARNING
1. Read and understand tool labels and manual. Failure to follow warnings could result in DEATH or SERIOUS INJURY.
2. Operators and others in work area MUST wear eye protection with side shields.
3. Keep fingers AWAY from trigger when tool is running.
4. Check for slipping material in support.
5. NEVER point tool at yourself or others while using.
6. NEVER use oxygen or other flammable gases.
CAUTION
Use high pressure air source. Always, never, use only most specific requirements established for this tool.
MAX CO., LTD.
1-6 SHIMIZU-1-1 HAKODAKI-CHO, CHUO-KU, TOKYO, JAPAN
www.max-europe.com (Europe only)
www.max-ltd.co.jp/en/ (Japan only)

PowerLite™ Framer HN100-ST

The 20 bar technology was first introduced by MAX in Japan in 1994 and is now available

FEATURES

APPLICATIONS



● Framing for roof



● Framing



● Wood to metal



● Decking
● Sheathing



● Dial adjustable depth control

Comes with plastic carry case



Only
2.9kg



● Reduced Exhaust Air System
Side exhaust with built-in silencer



● Trigger Lock Dial for safety

● Anti-double fire mechanism
(UK Patent 2286790)

● Maintenance free end cap filter
(DEU Patent 19539950)
(UK Patent 2294412)



● Unique tangle free swivel fitting

OPTIONS



Frame hanger for balance




Contact tips for fine finish



TOOL SPECIFICATIONS

MODEL	HN100-ST
WEIGHT	2.9 kg (5.3 lbs)
DIMENSIONS	378(H) × 117(W) × 317(L)mm
LOAD CAPACITY	50 nails - 60 nails
OPERATING PRESSURE	10 to 23 bar (140 to 320psi)
AIR CONSUMPTION	3.6ℓ/cycle at 18 bar (257psi) operating pressure
NOISE	A-weighted single-event sound power level LWA, 1s, d 92.81dB A-weighted single-event emission sound pressure level at work station LpA, 1s, d 87.35dB These values are determined and documented in accordance to EN12549:1999
VIBRATION	Vibration characteristic value = 6.6m/s ² These values are determined and documented in accordance to ISO 8662-11


For the **PowerLite Framer HN100** operation, the **PowerLite Compressor** and **PowerLite Hose** are required.

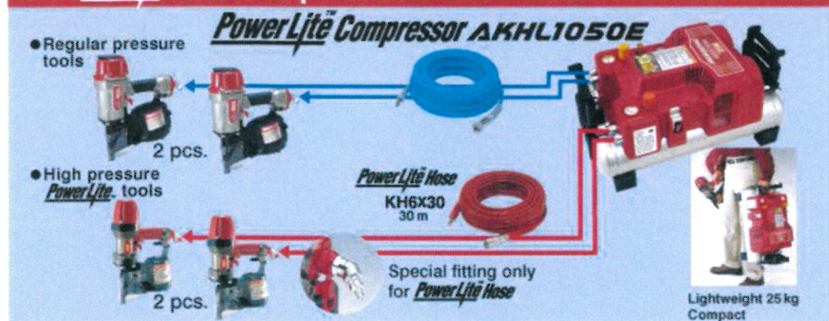

FASTENERS APPLICABLE

Head diameter
7.5 to 8.4 mm

0 degree flat plastic
sheet collated nails



Smooth
Screw and
Ring Shank

Nail length
65
to
100 mm

Shank diameter
2.8 to 4.1 mm

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

MAX

SIFCO
fastening solutions

AUCKLAND
34 Lansford Cres
Avondale 0600
09 828 2019

TAURANGA
3/94 Newton Rd
Mt Maunganui 3116
07 575 0088

CHRISTCHURCH
3 Industry Ave
Waterloo Park
03 358 8135

OS932NZ

www.sifco.co.nz