

SuperStapler

MAX®

18GA. narrow crown staples
TA238B/18-6

Drives 13~38mm (1/2"~1-1/2") length staples

FEATURES

■ Lightweight-only 1.2kg & Slim body

Compact and well balanced body. Easily reaches tight spots.

■ Selectable fire mechanism

The tool can be contact or single fired with switch lever.



■ Dial adjustable depth control

Dial depth control requires no special tools.

■ Belt hook



■ staple indicator on the magazine

APPLICATIONS

- Door and window casings
- Plywood, decorative boards, and other interior finish works
- Panel assembly and moldings
- Sub flooring
- Furniture assembly, case back fastening, blind pinning and other finishing work
- Cabinet assembly

Skill-Pro




Comes with a Plastic carry case

TOOL SPECIFICATIONS

PRODUCT NO.	TA238B/18-6
DIMENSIONS	241.5(H)×64(W)×231(L)mm 9-1/2"×2-1/2"×9-1/8"
WEIGHT	1.2kg (2.71lbs)
RECOMMENDED OPERATING PRESSURE	5 to 7bar (70 to 100 p.s.i.)
LOADING CAPACITY	100 Staples
AIR CONSUMPTION	0.61l (0.022ft³) at 7bar operating pressure
TECHNICAL DATA NOISE	A-weighted single-event sound power level LWA, 1s, d 87.2dB A-weighted single-event sound pressure level LpA, 1s, d 79.7dB
VIBRATION	Vibration characteristic value 2.59m/s²
	These values are determined and documented in accordance to EN12549:1999
	These values are determined and documented in accordance to ISO 8662-11

STAPLES APPLICABLE

18 Ga. narrow crown staples

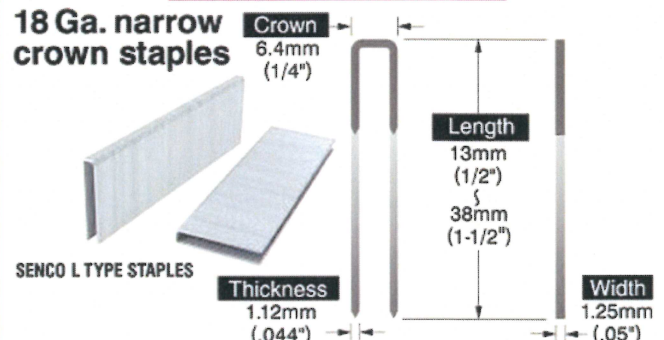

SENCO L TYPE STAPLES

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

MAX®

Sole NZ Distributor
SIFCO
fastening solutions

AUCKLAND
34 Lansford Cres
Avondale
Ph 09 828 2019

TAURANGA
3/94 Newton Rd
Mt Maunganui
Ph 07 575 0088

CHRISTCHURCH
3 Industry Ave
Waterloo Park
Ph 03 358 8135

www.sifco.co.nz
sales@sifco.co.nz

OS950NZ