

# SuperStapler

## TA551A/16-11ST


# MAX<sup>®</sup>



**drives 25–51mm (1"–2") 16ga. medium crown  
11mm (7/16") staples**

### FEATURES

- Lightweight-only 2.2 kg
- Newly designed 3 tooth driver blade (Patent pending)



The center teeth of the driver blade pushes the center part of the crown of each staple and side tooth hold it firmly so that it prevents jamming when it drives. The ditch of the driver blade holds each staple firmly and prevents slipping problem.




**Newly designed  
3 tooth driver blade**





- **Rapid fire trigger valve**  
Fastest medium crown stapler in the market. It drives 15 staples per second.

- **Quick and easy jam clearing by new design front latch** (Patent pending)



- **Adjustable depth control**
- **Maintenance free end cap filter** (DEU Patent 19539950, UK Patent 2294412)  
It prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a self-cleaning feature: foreign substances are ejected automatically from the tool when the air hose is disconnected.



- **New design click lever**
- **Comfortable rubber grip**
- **Durable aluminum frame and cylinder cap**


### APPLICATIONS

- Sheathing
- Subflooring
- Roof decking
- Furniture frames
- Pallets
- Crate and box assembly
- Vinyl siding

### TOOL SPECIFICATIONS

MODEL	TA551A/16-11ST
WEIGHT	2.2kg (4.9 lbs)
DIMENSIONS	288(H) × 84(W) × 356(L)mm 11-3/8" × 3-1/4" × 14"
LOAD CAPACITY	157 staples
OPERATING PRESSURE	5–7kg/cm (Regulator) 70–100 psi
AIR CONSUMPTION	1.10/cycle at 6 bar (90 psi) operating pressure
NOISE	A-weighted single-event sound power level LWA, 1s, d 93.78 dB A-weighted single-event emission sound pressure level at work station LpA, 1s, d 86.04 dB These values are determined and documented in accordance to EN12549:1999
VIBRATION	Vibration characteristic value = 3.6m/s <sup>2</sup> These values are determined and documented in accordance to ISO 8662-11

### STAPLES APPLICABLE

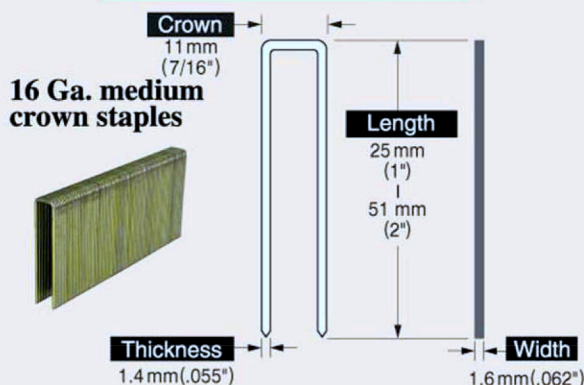

The specifications and design of the products in this brochure will be subject to change without advance notice due to our continuous efforts to improve quality of our products



Sole NZ Distributor:  
**SIFCO**  
fastening solutions<sup>®</sup>

**AUCKLAND**  
34 Lansford Cres  
Avondale 0600  
Ph 09 828 2019  
Fax 09 828 2017

**TAURANGA**  
3/94 Newton Rd  
Mt Maunganui 3116  
Ph 07 575 6546  
Fax 07 575 6546

**CHRISTCHURCH**  
3 Industry Ave  
Waterloo Park  
Ph 03 358 8135  
Fax 03 358 8930

[www.sifco.co.nz](http://www.sifco.co.nz)  
[sales@sifco.co.nz](mailto:sales@sifco.co.nz)

OS7713AN